

Master Catalogue

45/C



Electronic tapware since 1978

Master Catalogue


45/C



Electronic tapware since 1978

CONTENTS

Introduction	4
<hr/>	
Electronic taps	
kitchen taps	24
wall taps	32
washbasin taps	60
with long spout or extension	84
Electronic soap dispensers	104
Water+soap integrated system	116
Electronic hand dryers	124
Automatic hair dryers	130
Electronic showers	134
Electronic urinals	158
Electronic WCs	174

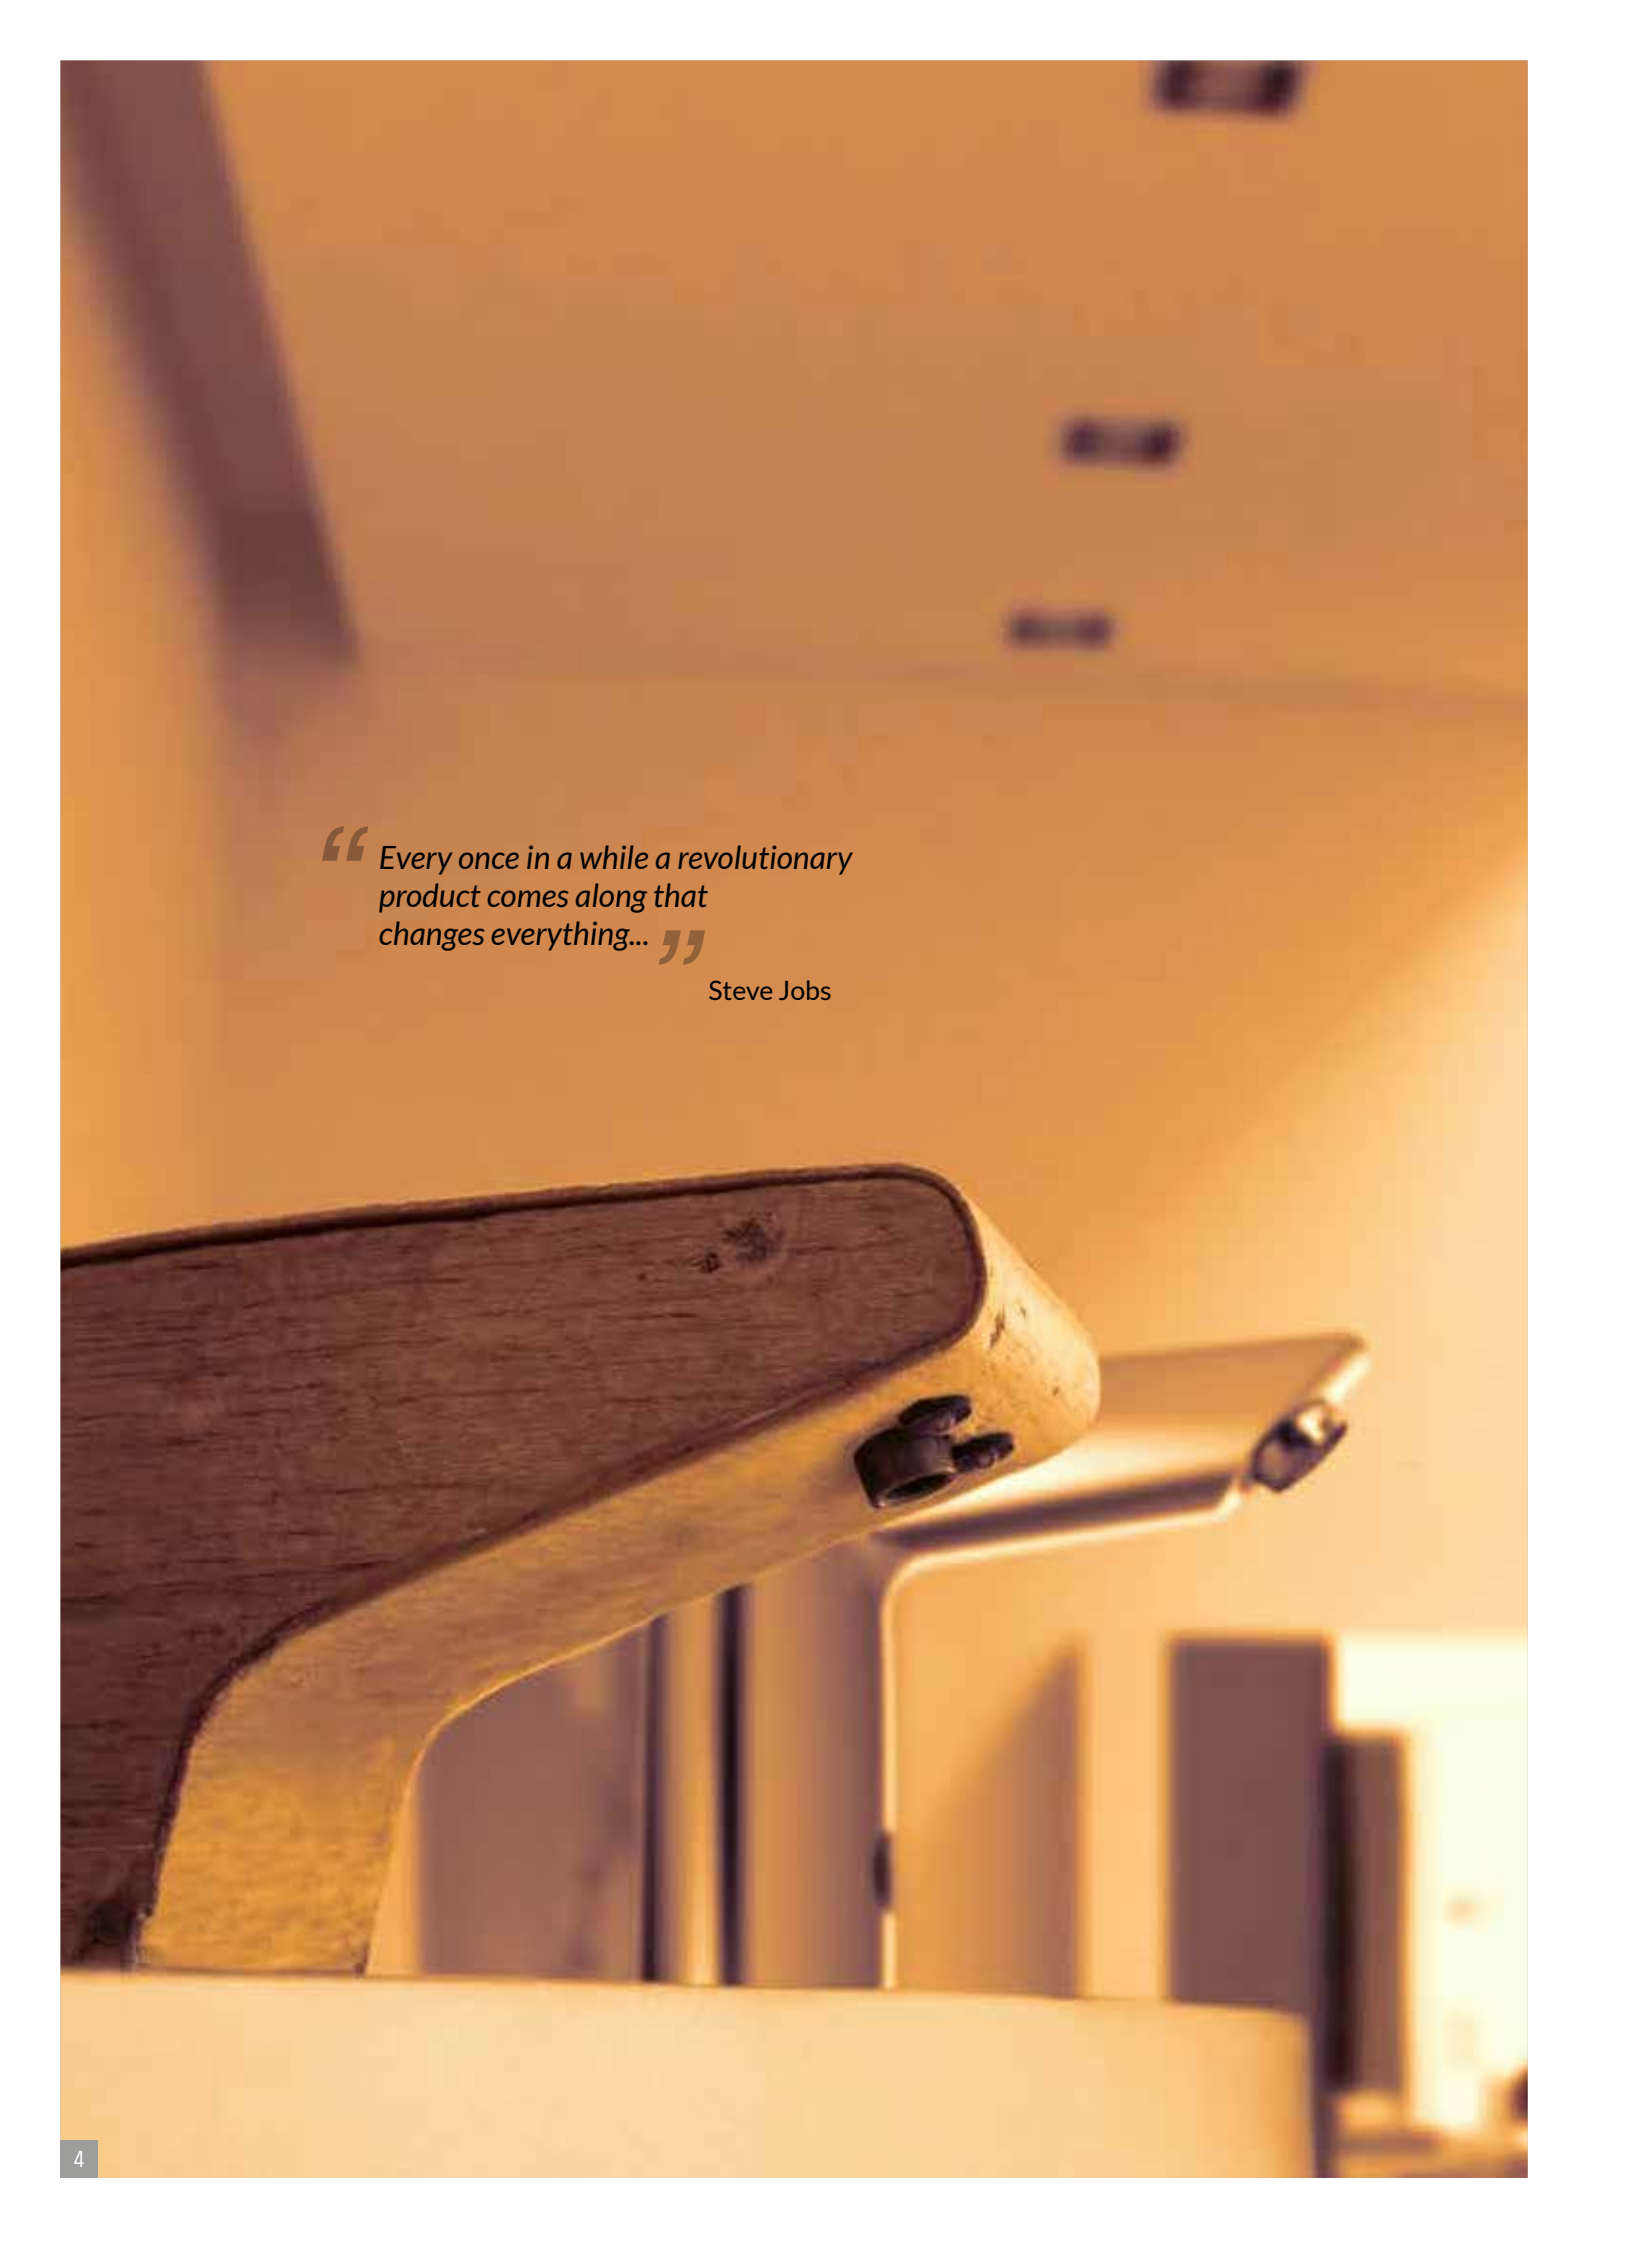

*“ Every once in a while a revolutionary
product comes along that
changes everything... ”*

Steve Jobs

A step forward

To look far to satisfy real needs. DMP's story starts from a brilliant idea making our small everyday gestures simple: washing our hands using little water, with the right quantity of soap to dry them in a few seconds, without wasting any paper. Eco-friendly technology for sustainable development, this is our


guideline that crosses the decades and epochal changes, leaving the desire to learn, to restart, to grow and improve, unchanged. We learn from the past cast into the future, to offer the market quick and effective solutions through safe, efficient and reliable products, made with passion, skill and teamwork.



The first DMP Electronics patent



The first electronic hand dryer with the first infrared sensors

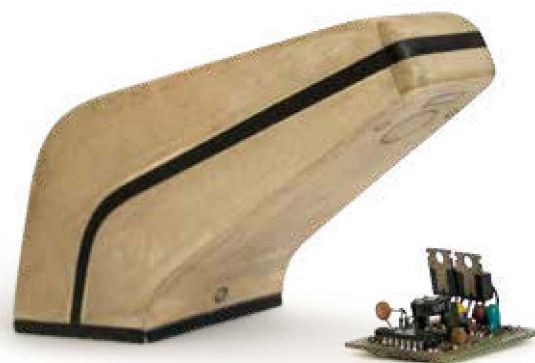

The first aesthetic prototype of electronic tap with its original circuit



Friendly technology

The DMP universe is in constant evolution, and the galaxies that create it are increasingly more numerous.

We've been ahead of our times, inventing the electronic tap, and work continuously to maintain the technological level of our products high. Quality in quantity: models designed by the best designers in the sector and made with care down

to the last detail. New products and great classics make up the richest and most complete product range on the market, consisting of over one thousand items. The factory becomes a lab of ideas, to provide design studios with constant and careful service, made up of useful suggestions and solutions in real time.






Italian symphony

We have a heritage of culture and knowledge that has formed over centuries. Inventing things and shaping matter are our main features, the Italian pride that makes us unique and believable all over the world. DMP is an integral

part of this strip of the planet, a microcosm consisting of companies that love creating and making on their own, with sartorial care for the product and the materials that make it. This is the reason why we have wanted a wholly Italian supply

chain, with certified materials with low environmental impact and selected suppliers that share our objectives and assert like us an idea of company that combines tradition and modernity.

Production process

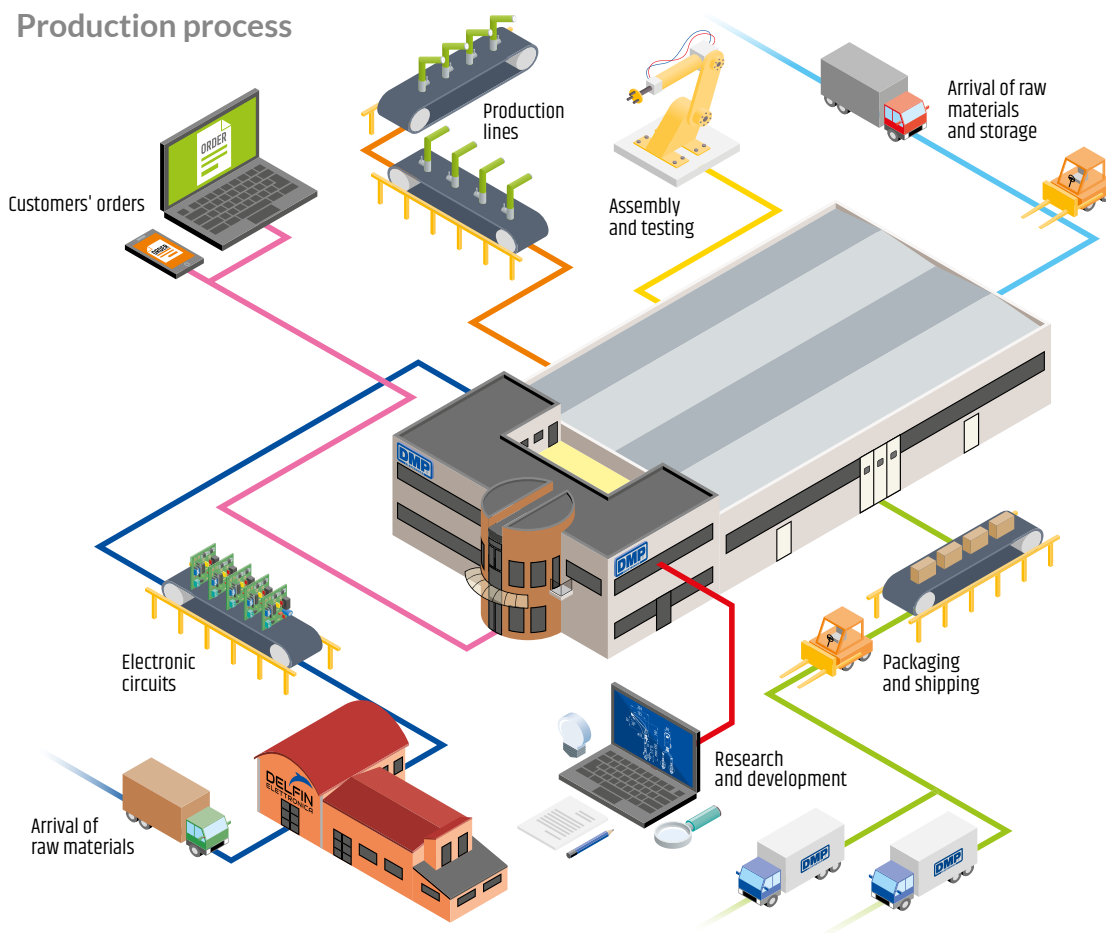



An eye on the world



We've always been guided by a strong international vocation. The feeling of belonging to the Country merges with a cosmopolitan spirit, a real launching pad to seduce and win the most demanding markets. There is at least one DMP product in 107 nations of the world, the tangible proof of a presence that does not go unnoticed. In this list we show the most important markets currently covered.

Europe

Belgium, Croatia, Denmark, France, Germany, Greece, Hungary, Latvia, Luxembourg, Macedonia, Malta,

Moldova, Netherlands, Poland, Portugal, Romania, Russia, Spain, Slovenia, Sweden, Switzerland, United Kingdom.

Mediterranean basin


Egypt, Lebanon, Morocco, Tunisia.

Asia


Bahrain, China, Hong Kong, Iran, Jordan, Kuwait, Macao, Oman, Qatar, Saudi Arabia, Taiwan, United Arab Emirates, Vietnam.

Americas and Oceania

Argentina, Australia, Canada, Costa Rica, Mexico, Venezuela.

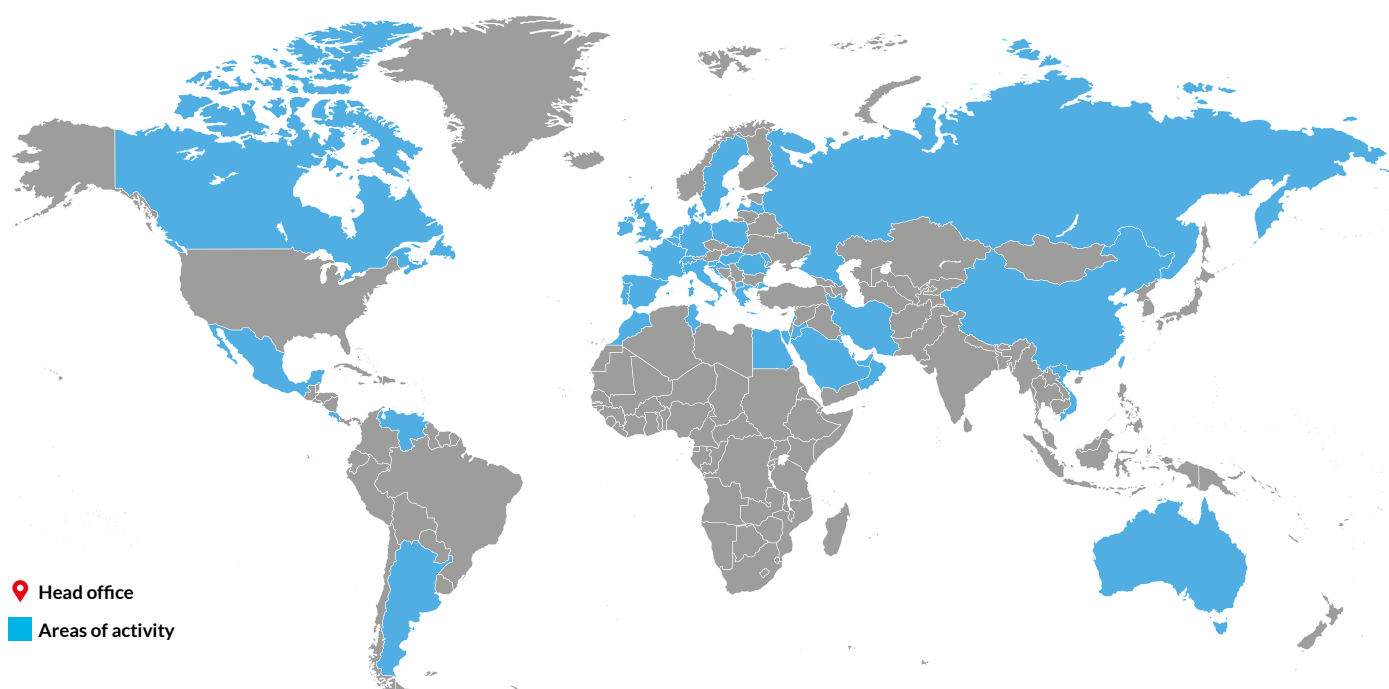

📍 Head office
🇮🇹 Areas of activity



*“ A better planet is a dream
that starts to be realised when
everyone of us decides to better
ourselves. ”*

Mahatma Gandhi

Simply water


The choice to make environmentally-friendly products comes from the conviction that water, a precious and irreplaceable asset, must be protected and defended by everybody. Today more than ever, DMP contributes to preserve the environmental heritage, in the light of a renewed common sensitivity and the birth of international

bodies that safeguard the water resources and certify “virtuous” companies. Our choice starts from afar and goes straight to the target: used intelligently and rationally, DMP products protect the environment in a concrete and immediate way because they use up to 80% water less than normal taps. A small great help for our planet.



AVERAGE DAILY WATER CONSUMPTION

Differences between traditional taps and DMP electronic tapware

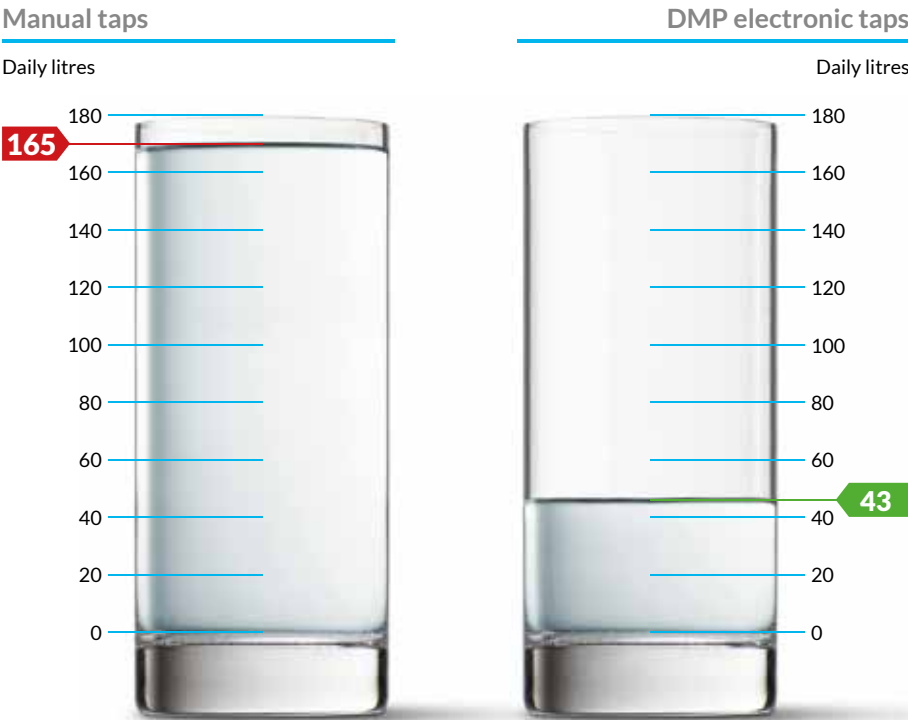

Portfolio



SuperTris HS registered design by DMP Electronics and Simone Micheli

> supertris.it

1 LED backlit mirrors

2 SuperTris HS – Hand-washing group with concealed electronic controls





SuperTris VM registered design by DMP Electronics and Simone Micheli



3 HPL partitions with concealed feet > dmparredi.it








1 and 2 Hello 100, p.26





Patented

3 Handly, p.62 4 Arco Plus RZ, p.92

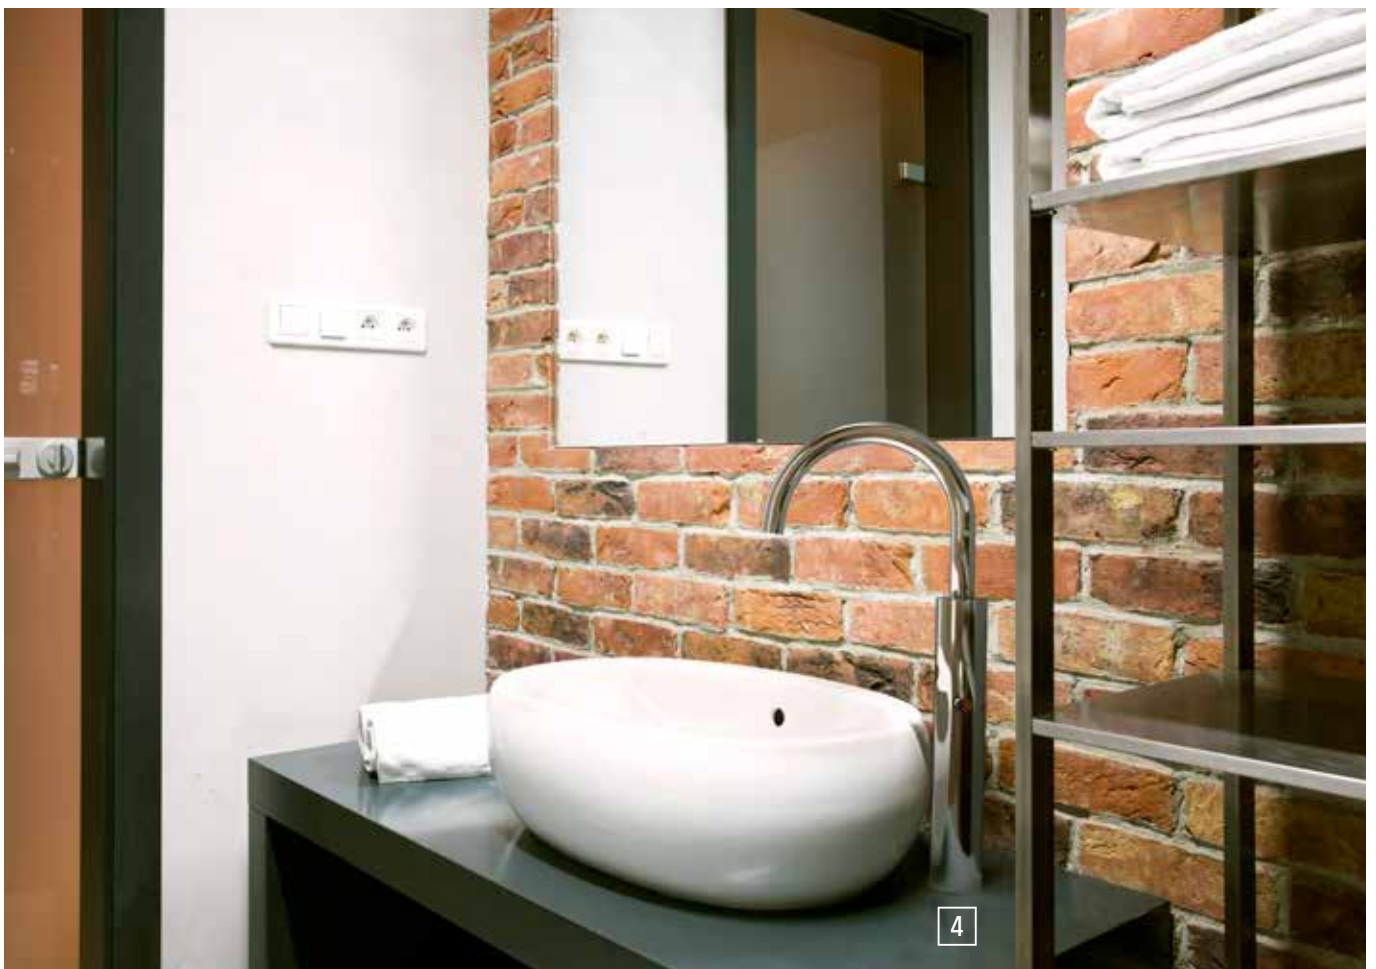


Product range

Category	Model	Page
■ Kitchen electronic taps	Hello 100 <i>NEW</i>	26
	Hello 200 <i>NEW</i>	28
	Oceanus Plus <i>NEW</i>	30
■ Wall electronic taps	Ovalis	34
	Quadro Q	36
	Quadro T	38
	Quadro R <i>NEW</i>	40
	Quadro Y <i>NEW</i>	42
	MiniUno 40 Mono Sensor	44
	MiniUno 40 Dual Sensor <i>NEW</i>	46
	MiniUno 40 On-Off Sensor <i>NEW</i>	47
	Speedymix Comp Mono Sensor	48
	Speedymix Comp Dual Sensor <i>NEW</i>	49
	Speedy	50
	Speedy C	53
	Sanileo	55
	Uno	56
	MiniUno 32	58
■ Washbasin electronic taps	Handly <i>NEW</i>	62
	Cento	64
	Quary	66
	Tube Plus	68
	Eco Plus	70
	Green <i>NEW</i>	72
	Class Metal	74
	Class ABS	76
	Sette	78
	Compacto	80
	Dia	82
■ Electronic taps with long spout or extension	Arco Plus	86
	Billo	88
	Billo Plus	90
	Arco Plus RZ	92
	Tube Plus RZ	96
■ Electronic soap dispensers	MiniUno Soap <i>NEW</i>	106
	Quary Soap	108

Category	Model	Page
■ Electronic soap dispensers	Tube Soap <i>NEW</i>	110
	Sanisoap Inox	112
	Sanisoap ABS	114
■ Water+soap integrated system	Rubidos 01 <i>NEW</i>	118
	Rubidos 03 <i>NEW</i>	120
	Rubidos 12 <i>NEW</i>	122
■ Electronic hand dryers	Turbo	126
	Aria	128
■ Automatic hair dryers	PickUp	132
■ Electronic showers	Splash	136
	Spin	138
	SBD	140
	SBD Wireless <i>NEW</i>	140
	Nilo	142
	DCE 28 ST	144
	DCE 28 ST Plus	146
	DCE 28 Tag	148
	DCE 28 Tag Plus	150
	DCE 28 GT <i>NEW</i>	152
	DCE 28 GT Plus <i>NEW</i>	154
	Doccia a passaggio	156
■ Electronic urinals	Flush In Glass <i>NEW</i>	160
	Fin Glass <i>NEW</i>	162
	Fin	164
	Flush Comp	166
	Flash Box	168
	Saniflush	170
	River Extra	172
■ Electronic WCs	Dikaflush Glass <i>NEW</i>	176
	Dikaflush	180
	Flussometri M Fix - M Lux <i>NEW</i>	184
	Riomatic	189
	FM 14300	189
	Dikaflush Tecno Block ST <i>NEW</i>	189
	Dika Zaino BT <i>NEW</i>	189

Electronic kitchen taps

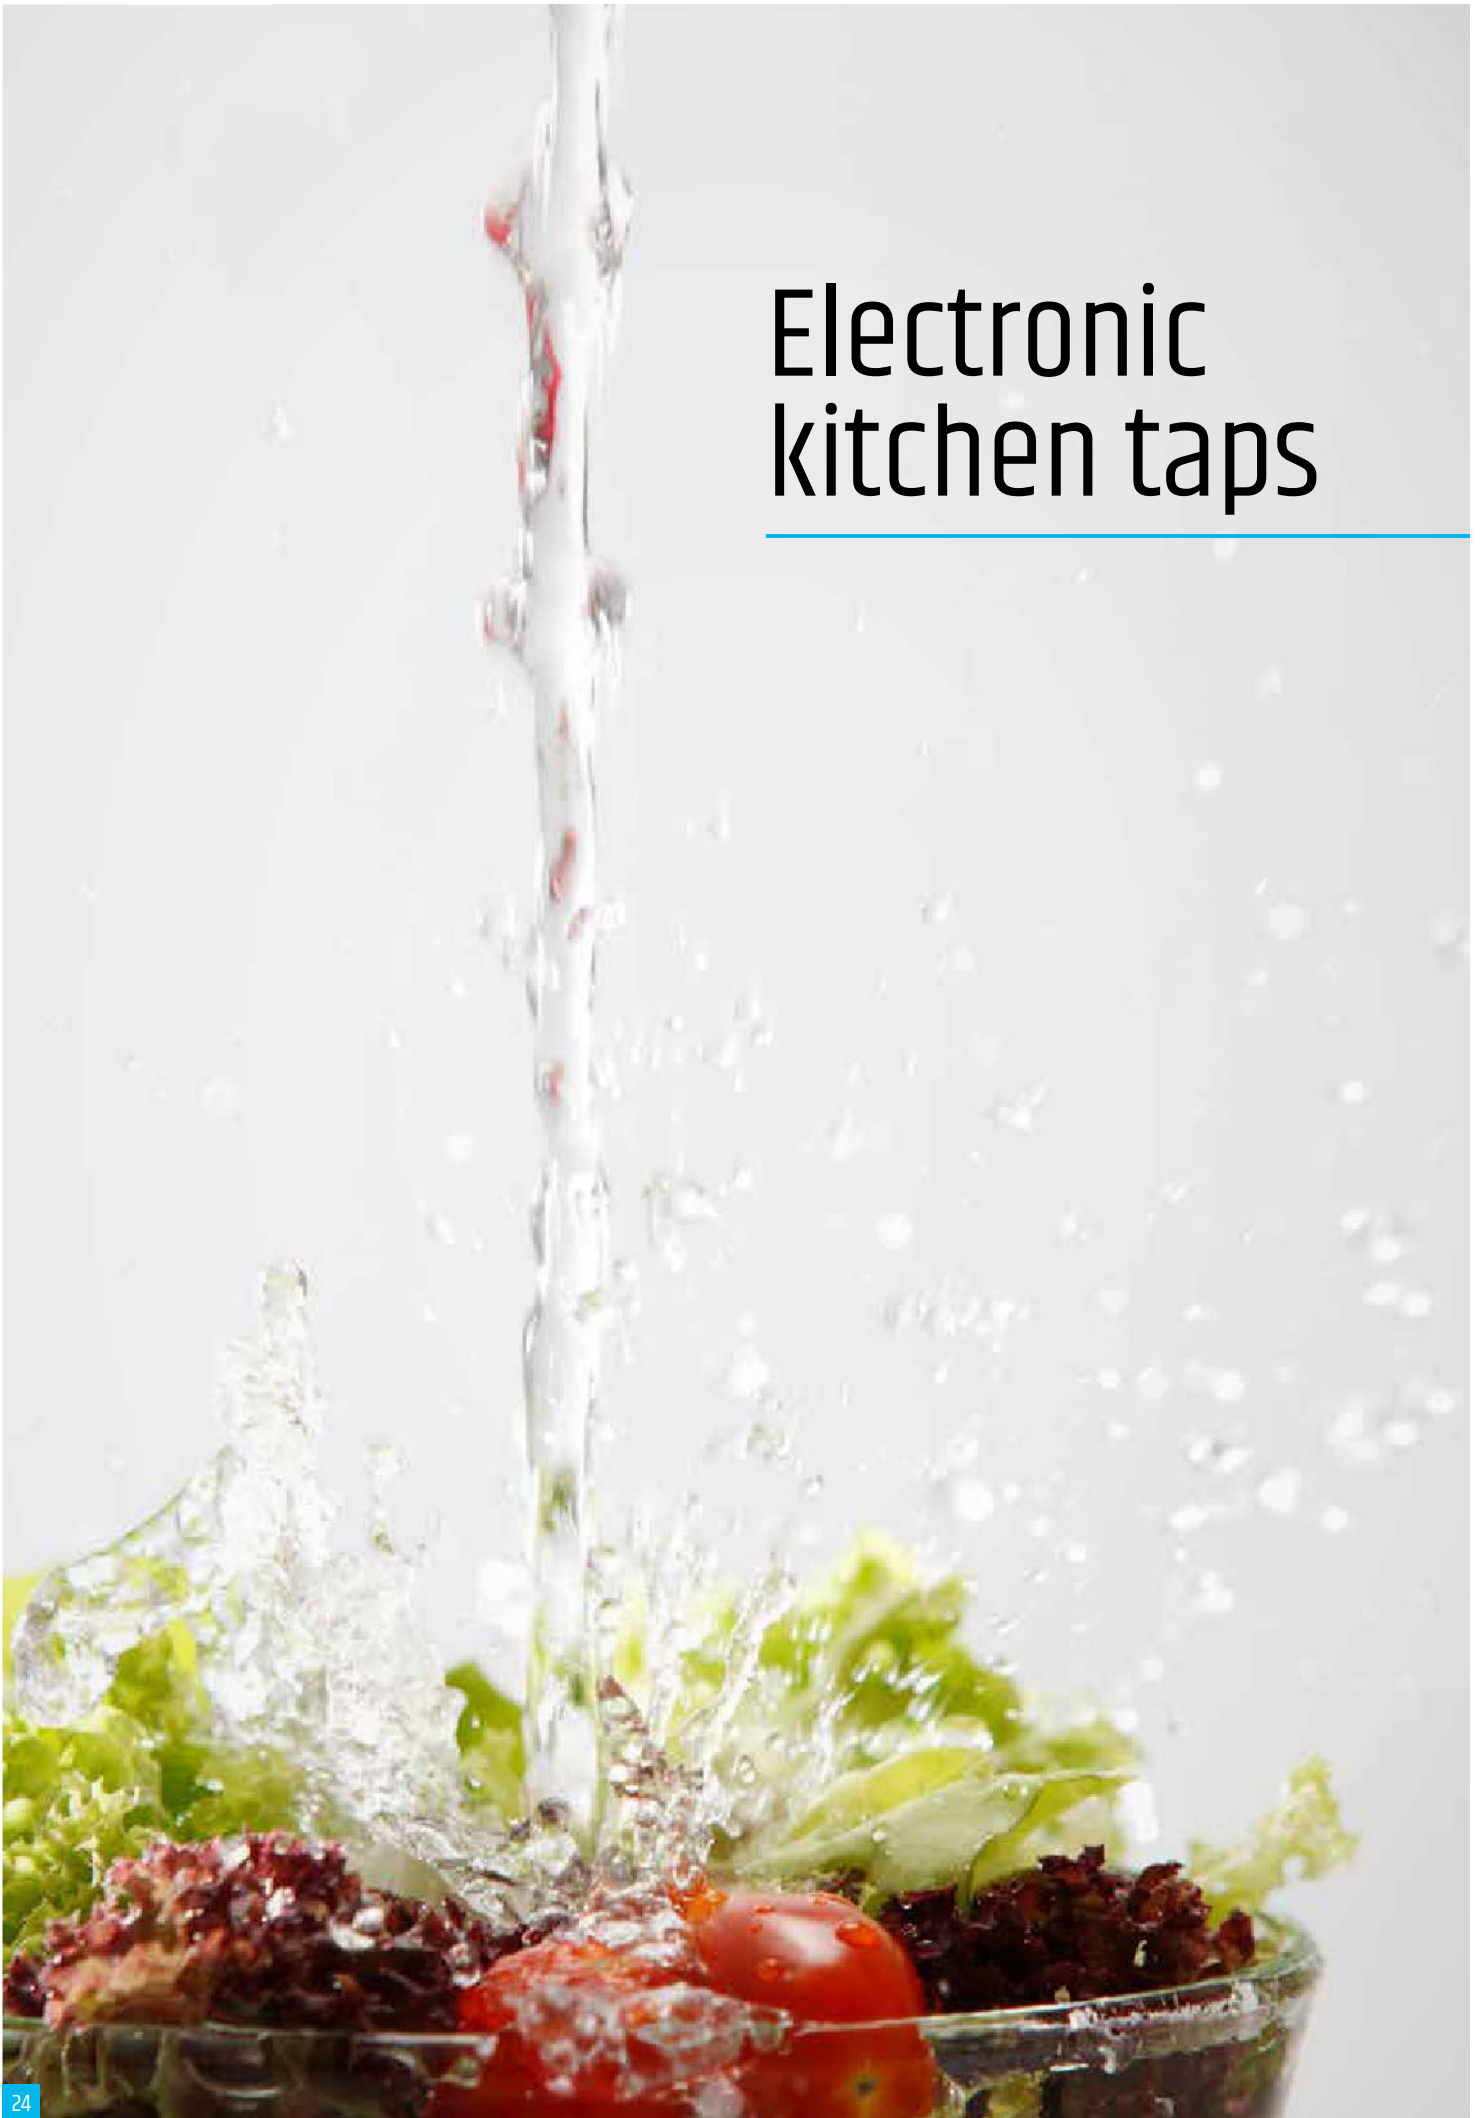



Main features

- ☒ DMP Dual **Sensor technology**
- ☒ Up to **50%** water saving
- ☒ **Simple** installation
- ☒ Supply with "AA" alkaline **common batteries**
- ☒ **Manual** function
- ☒ **Anti-flooding** automatic stop after 3 minutes
- ☒ 360° **rotating** spout, ideal for island kitchens
- ☒ Complete packs, **everything included**
- ☒ 2 years' **warranty**



Hello 100
p. 26

NEW



Hello 200
p. 28

NEW



Oceanus Plus
p. 30

NEW



Certifications

CE EMC ACS HACCP PG



Hello 100

Patented

NEW

On-Off Sensor

Water starts flowing as soon as someone approaches the tap from the front; useful for dispensing water or filling containers.

Eco-Flow Sensor

It detects the presence of objects or people approaching from below, making it ideal for washing hands or objects.



For residential use



Features

Electronic tap with DMP Dual Sensor technology
Sleek and sharp line design
Tempered glass on-off front sensor
Solenoid valve built into the tap body
Sensor beam adjustable from 5 to 20 cm
Ceramic disk mixer
Anti-limescale tap aerator
Manual function to be activated in case of depleted batteries
Miniature components, integrated in the chrome-plated brass body
Anti-flooding automatic stop after 3 minutes
Solenoid valve with triple stainless steel anti-contaminant filter
Connections with stainless steel filter and built-in non-return valves
360° rotating spout, ideal for island kitchens
Colours with special pigments, certified for food use

Power

1.5V alkaline AA batteries
Battery life: 4 years with an average of 200 operations per day
Flat battery warning LED light on front sensor
Built-in waterproof battery case



Pack contents



Batteries included



www.dmpelectronics.com/en/product-details/hello-100



Hello 100 with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
Hello 100 2 X 1.5V alkaline batteries	86706	Polished chrome		Fitted with On-Off front sensor and Eco-Flow vertical sensor
	86703	Chrome/White		
	86799	Chrome/Black		
	86708	Satin finish		
	86723	Chrome/Anthracite		
	86712	Chrome/Bronze		
	86701	Chrome/Warm beige		
	86728	Chrome/Chocolate		
	86709	Chrome/Sun yellow		
	86702	Chrome/Sicilian orange		
	86710	Chrome/Flame red		
	86729	Chrome/Purple red		
	86730	Chrome/Deep purple		
	86725	Chrome/Horizon blue		
	86705	Chrome/Lime green		



Available colours





Hello 200

Patented


NEW

On-Off Sensor

Water starts flowing as soon as someone approaches the tap from the front; useful for dispensing water or filling containers.

Eco-Flow Sensor

It detects the presence of objects or people approaching from below, making it ideal for washing hands or objects.

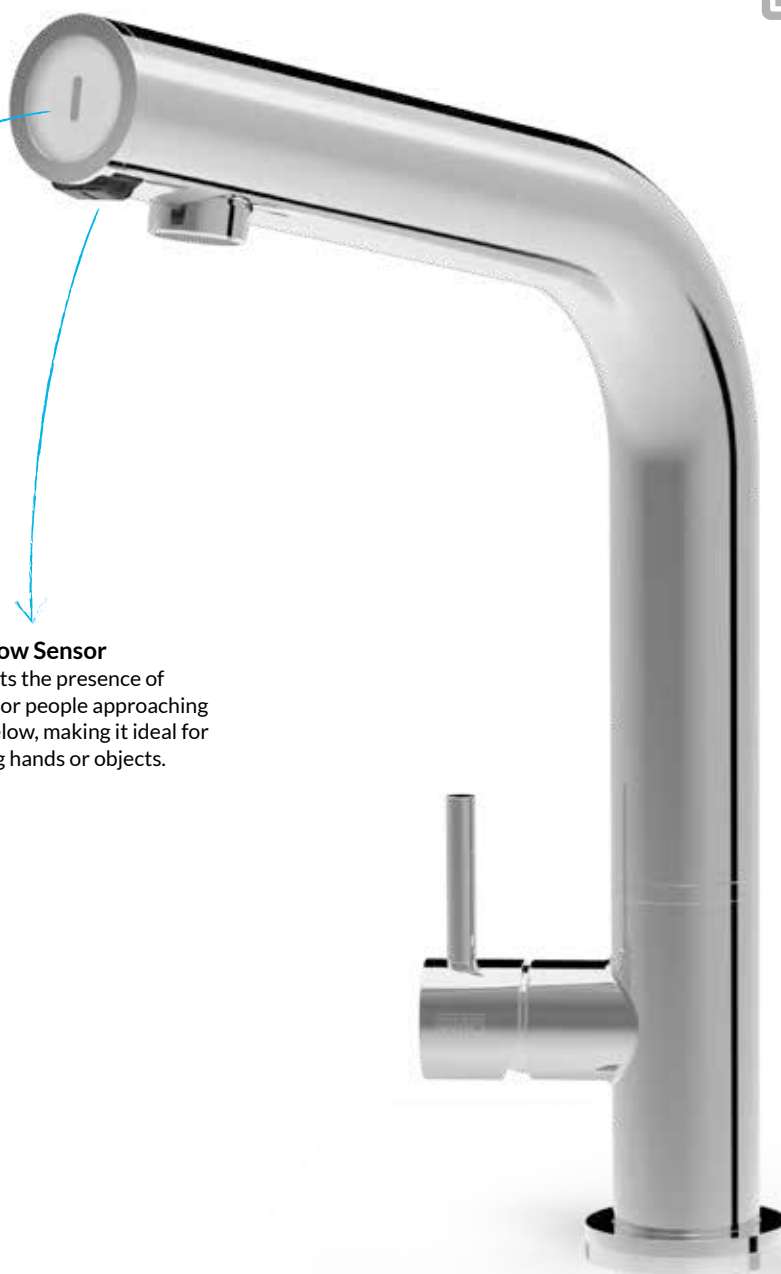

For residential use



Features

Electronic tap with DMP Dual Sensor technology
Soft and flowing line design
Tempered glass on-off front sensor
Solenoid valve built into the tap body
Sensor beam adjustable from 5 to 20 cm
Ceramic disk mixer
Anti-limescale tap aerator
Manual function to be activated in case of depleted batteries
Miniature components, integrated in the chrome-plated brass body
Anti-flooding automatic stop after 3 minutes
Solenoid valve with triple stainless steel anti-contaminant filter
Connections with stainless steel filter and built-in non-return valves
360° rotating spout, ideal for island kitchens
Colours with special pigments, certified for food use

Power

1.5V alkaline AA batteries
Battery life: 4 years with an average of 200 operations per day
Flat battery warning LED light on front sensor
Built-in waterproof battery case



Pack contents



www.dmpelectronics.com/en/product-details/hello-200



Hello 200 with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
Hello 200 2 X 1.5V alkaline batteries	86806	Polished chrome		Fitted with On-Off front sensor and Eco-Flow vertical sensor
	86803	Chrome/White		
	86899	Chrome/Black		
	86808	Satin finish		
	86823	Chrome/Anthracite		
	86812	Chrome/Bronze		
	86801	Chrome/Warm beige		
	86828	Chrome/Chocolate		
	86809	Chrome/Sun yellow		
	86802	Chrome/Sicilian orange		
	86810	Chrome/Flame red		
	86829	Chrome/Purple red		
	86830	Chrome/Deep purple		
	86825	Chrome/Horizon blue		
	86805	Chrome/Lime green		



Available colours



Oceanus Plus

Patented



NEW

On-Off Sensor

Water starts flowing as soon as someone approaches the tap from the front; useful for dispensing water or filling containers.

Eco-Flow Sensor

It detects the presence of objects or people approaching from below, making it ideal for washing hands or objects.



For professional use



Features

Electronic tap with DMP Dual Sensor technology
 Tempered glass on-off front sensor
 Solenoid valve built into the tap body
 Sensor beam adjustable from 5 to 25 cm
 Ceramic disk mixer
 Anti-limescale tap aerator
 Manual function to be activated in case of depleted batteries
 Miniature components, integrated in the chrome-plated brass body
 Anti-flooding automatic stop after 6 minutes
 Solenoid valve with triple stainless steel anti-contaminant filter
 Connections with stainless steel filter and built-in non-return valves
 Mixer body for increased water flow
 360° rotating spout, ideal for island kitchens
 Polished or satin brass tap body and spout

Power

1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case



Pack contents






www.dmpelectronics.com/en/product-details/oceanus-plus




Oceanus Plus with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
 Oceanus Plus 200 BT 2 X 1.5V alkaline batteries	76046 76048	Polished chrome Satin chrome		Fitted with On-Off front sensor and Eco-Flow vertical sensor
Oceanus Plus 300 BT 2 X 1.5V alkaline batteries	76056 76058	Polished chrome Satin chrome		Fitted with On-Off front sensor and Eco-Flow vertical sensor

Electronic wall taps

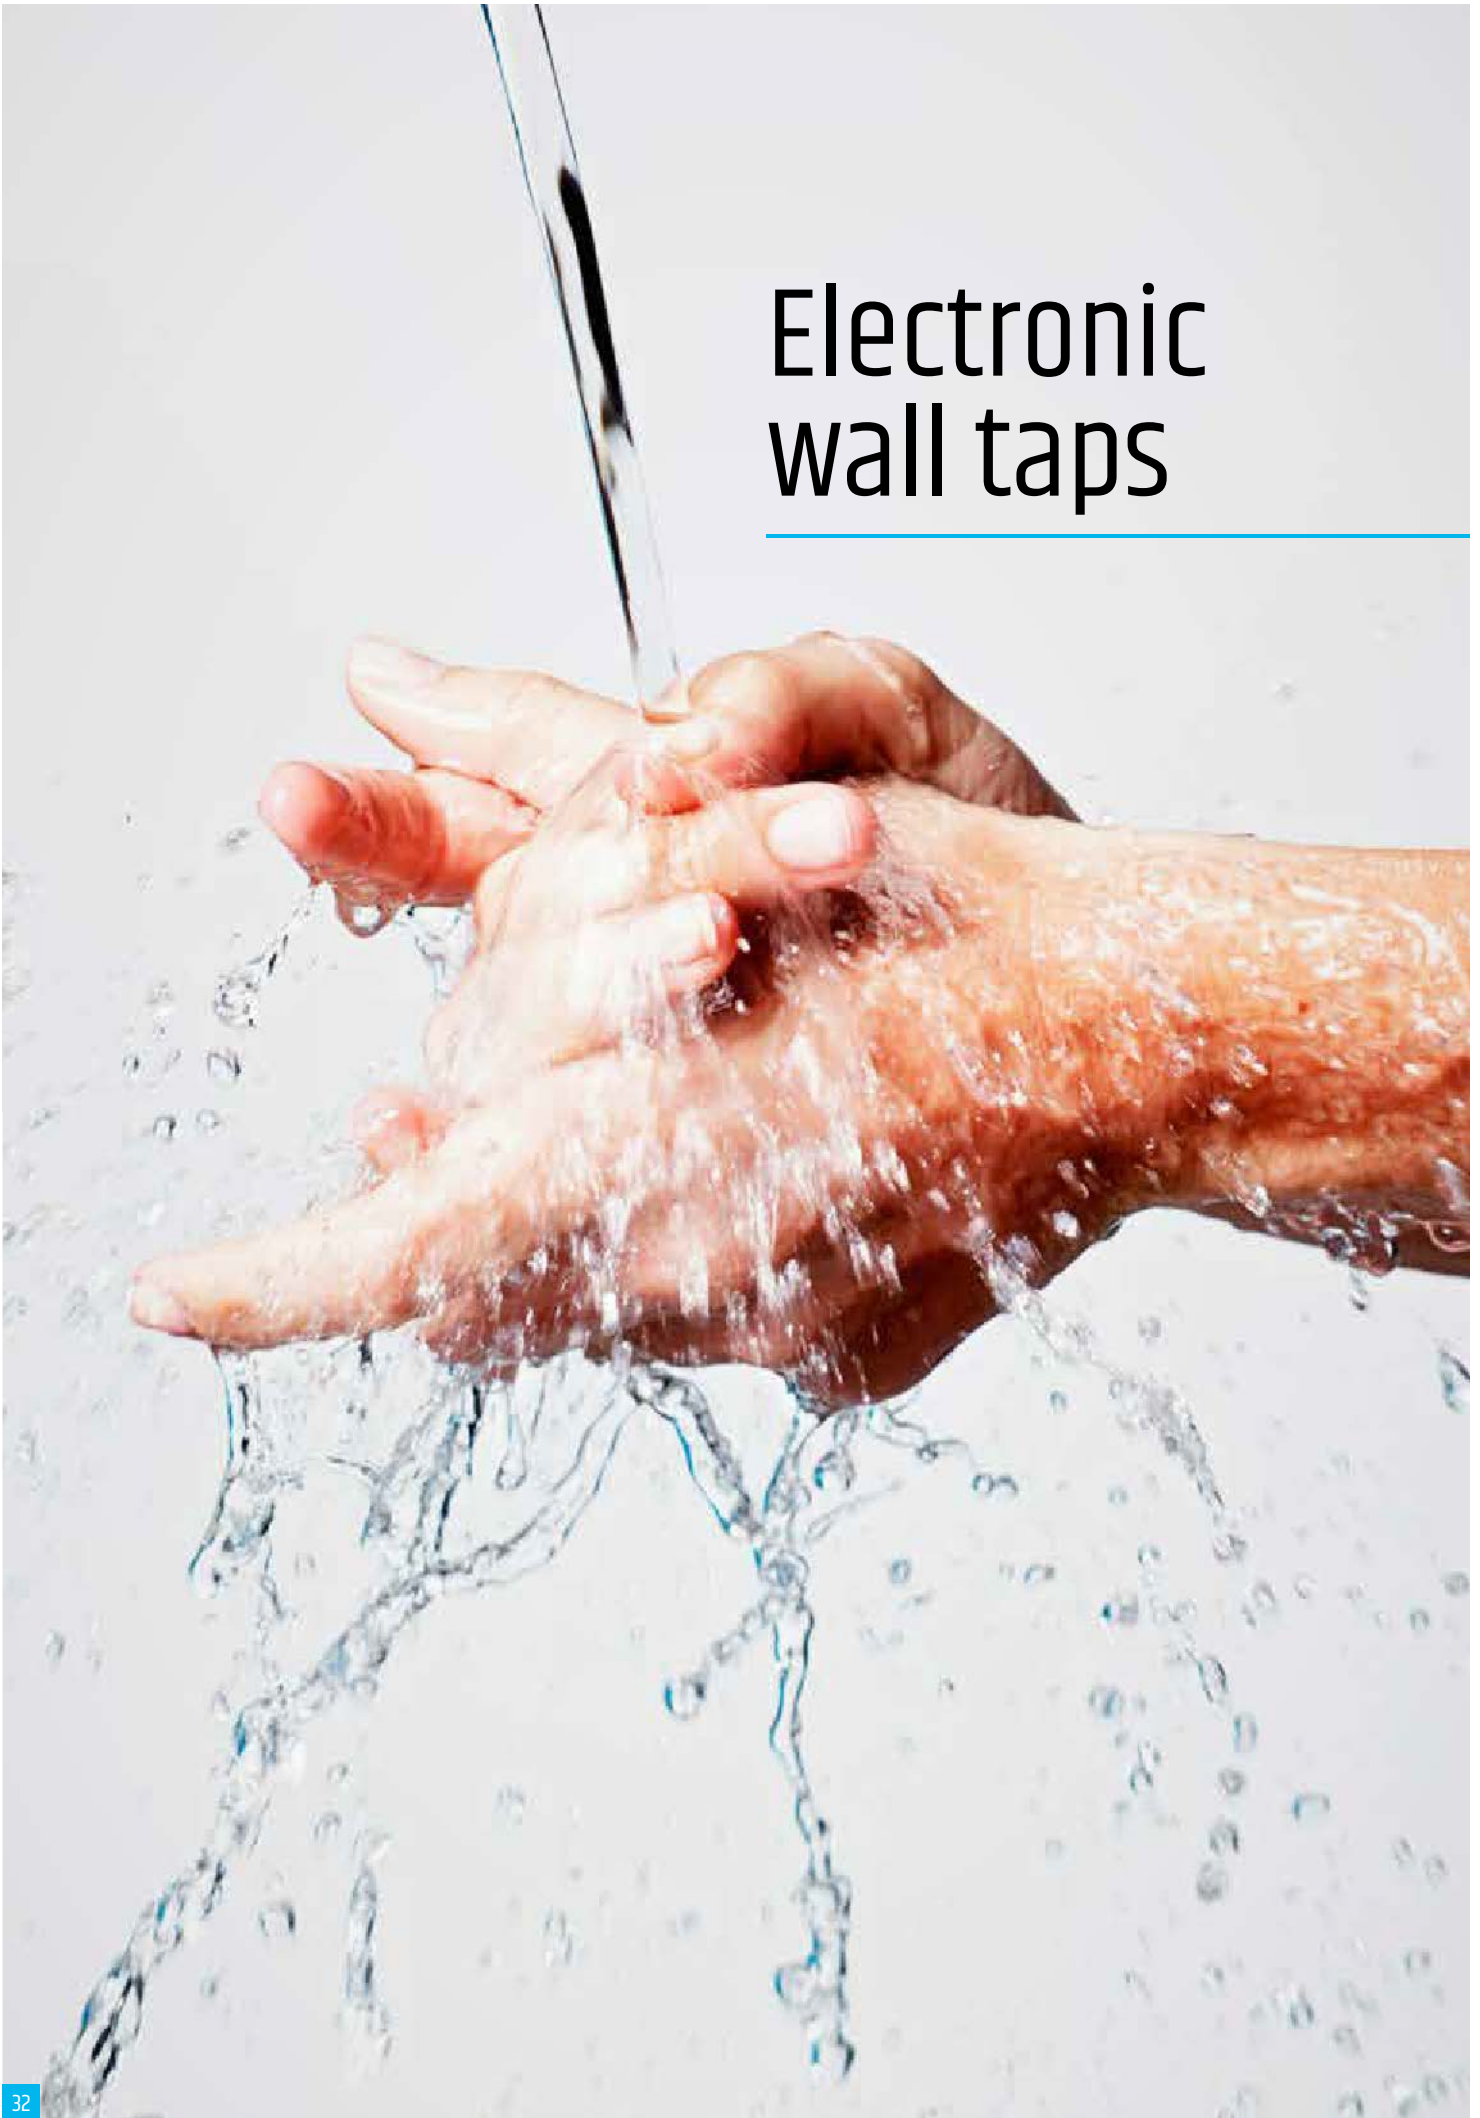



Main features

- ✓ **DMP Infrared Sensor** technology
- ✓ Up to **80%** water saving
- ✓ **Simple** installation
- ✓ **Same price** for battery or mains models
- ✓ Can be installed also on **plasterboard**
- ✓ Use of **common alkaline batteries**
- ✓ Safety **transformer** (IMQ)
- ✓ Complete packs, **everything included**
- ✓ 2 years' **warranty**



Certifications



Ovalis
p. 34



Quadro Q
p. 36



Quadro T
p. 38



Quadro R
p. 40

NEW



Quadro Y
p. 42

NEW



MiniUno 40
p. 44



SpeedyMix Comp
p. 48



Speedy
p. 50



Sanileo
p. 55



Uno
p. 56



MiniUno 32
p. 58



Features

For all models

Electronic tap with anti-scratch and anti-limescale DMP sensor
 3 V waterproof electronic circuit
 Microchip programmed to control all functions
 Functions optimized using DMP integrated software
 Sensor beam adjustable from 5 to 30 cm
 Polished stainless steel plate with vandal-proof concealed screws
 Recessed stainless steel box with quick-fit couplings
 Anti-flooding automatic stop after 90 seconds
 Optimized water consumption with 6 l/min limiter
 Solenoid valve with triple stainless steel anti-contaminant filter
 Stop taps with in-built stainless steel filters and non-return valves

For battery models


1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case

For mains models

230Vac - 5Vdc safety transformer



Pack contents

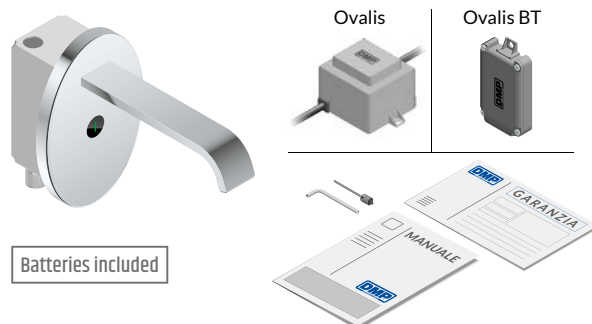




www.dmpelectronics.com/en/product-details/ovalis






Ovalis Mix with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm
 Ovalis-mix BT 2 X 1.5V alkaline batteries	87026	Polished chrome	
 Ovalis-mix 230Vac/5Vdc transformer	27026	Polished chrome	




Ovalis for cold or pre-mixed water

Model and feeding	Code	Colour	Dimensions in mm
 Ovalis BT 2 X 1.5V alkaline batteries	83426	Polished chrome	
 Ovalis 230Vac/5Vdc transformer	23426	Polished chrome	

Accessories

Model	Code
Metal frame for plasterboard walls	55503

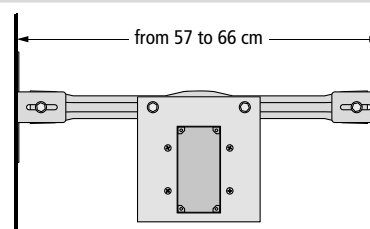

On request, recessed boxes can be supplied in advance

Quadro Q



Features

For all models

Electronic tap with anti-scratch and anti-limescale DMP sensor
 4.5V waterproof electronic circuit
 Microchip programmed to control all functions
 Functions optimized using DMP integrated software
 Sensor beam adjustable from 5 to 30 cm
 Polished stainless steel plate with vandal-proof concealed screws
 Recessed stainless steel box with quick-fit couplings
 Anti-flooding automatic stop after 90 seconds
 Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute
 Solenoid valve with triple stainless steel anti-contaminant filter
 Stop taps with in-built stainless steel filters and non-return valves

For battery models


1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case

For mains models

230Vac - 5Vdc safety transformer



Pack contents

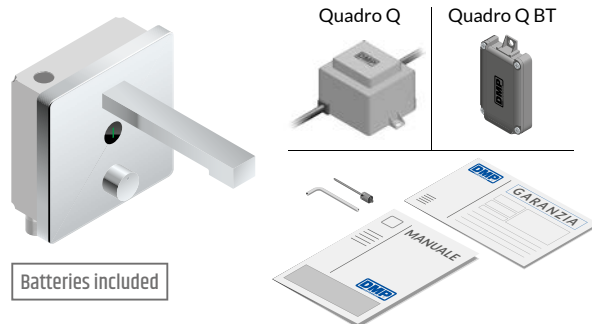




www.dmpelectronics.com/en/product-details/quadro-q






QuadroMix Q with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm
 QuadroMix-Q1623 BT 3 X 1.5V alkaline batteries	67356	Polished chrome	
 QuadroMix-Q1623 230Vac/5Vdc transformer	07356	Polished chrome	




Quadro Q for cold or pre-mixed water

Model and feeding	Code	Colour	Dimensions in mm
 Quadro-Q1623 BT 3 X 1.5V alkaline batteries	67256	Polished chrome	
 Quadro-Q1623 230Vac/5Vdc transformer	07256	Polished chrome	

Accessories

Model	Code
Metal frame for plasterboard walls	55506

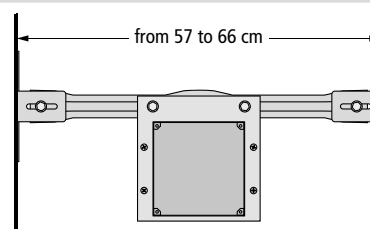

On request, recessed boxes can be supplied in advance



Features

For all models

Electronic tap with anti-scratch and anti-limescale DMP sensor
 4.5V waterproof electronic circuit
 Microchip programmed to control all functions
 Functions optimized using DMP integrated software
 Sensor beam adjustable from 5 to 30 cm
 Polished stainless steel plate with vandal-proof concealed screws
 Recessed stainless steel box with quick-fit couplings
 Anti-flooding automatic stop after 90 seconds
 Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute
 Solenoid valve with triple stainless steel anti-contaminant filter
 Stop taps with in-built stainless steel filters and non-return valves

For battery models


1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case

For mains models

230Vac - 5Vdc safety transformer



Pack contents

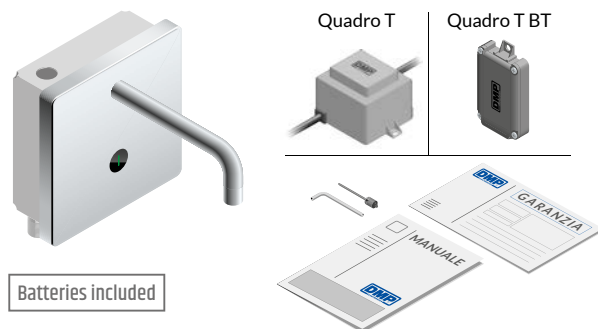




www.dmpelectronics.com/en/product-details/quadro-t






QuadroMix T with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm
 QuadroMix-T1518 BT 3 X 1.5V alkaline batteries	67306	Polished chrome	
 QuadroMix-T1518 230Vac/5Vdc transformer	07306	Polished chrome	




Quadro T for cold or pre-mixed water

Model and feeding	Code	Colour	Dimensions in mm
 Quadro-T1518 BT 3 X 1.5V alkaline batteries	67206	Polished chrome	
 Quadro-T1518 230Vac/5Vdc transformer	07206	Polished chrome	

Accessories

Model	Code
Metal frame for plasterboard walls	55506

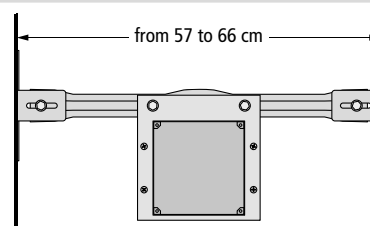

On request, recessed boxes can be supplied in advance



Quadro R

NEW



Features

For all models

Electronic tap with anti-scratch and anti-limescale DMP sensor

Screwless plate

4.5V waterproof electronic circuit

Microchip programmed to control all functions

Functions optimized using DMP integrated software

Sensor beam adjustable from 5 to 30 cm

Polished stainless steel plate without screws (4mm thick)

Recessed stainless steel box with quick-fit couplings

Anti-flooding automatic stop after 90 seconds

Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute

Solenoid valve with triple stainless steel anti-contaminant filter

Stop taps with in-built stainless steel filters and non-return valves

For battery models

1.5V alkaline AA batteries

Battery life: 4 years with an average of 200 operations per day

Warning of flat batteries through LEDs on sensors

Built-in waterproof battery case

For mains models


230Vac - 5Vdc safety transformer



Pack contents



Batteries included









www.dmpelectronics.com/en/product-details/quadro-r




QuadroMix R with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm
 QuadroMix-R 215-BT 3 X 1.5V alkaline batteries	67806	Polished chrome	
 QuadroMix-R 215 230Vac/5Vdc transformer	07806	Polished chrome	
 QuadroMix-R 150-BT 3 X 1.5V alkaline batteries	67506	Polished chrome	
 QuadroMix-R 150 230Vac/5Vdc transformer	07506	Polished chrome	

Accessories

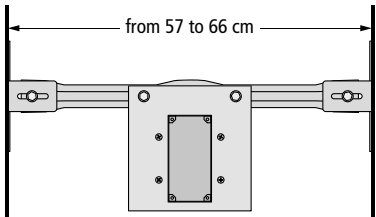Model	Code	
Metal frame for plasterboard walls	55546	



On request, recessed boxes can be supplied in advance



Quadro Y

Patented

NEW



Features

For all models

Electronic tap with DMP On-OFF sensor in tempered glass

Screwless plate

4.5V waterproof electronic circuit

Microchip programmed to control all functions

Functions optimized using DMP integrated software

Horizontal polished stainless steel plate without screws (4mm thick)

Recessed stainless steel box with quick-fit couplings

Anti-flooding automatic stop after 3 minutes

Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute

Solenoid valve with triple stainless steel anti-contaminant filter

Stop taps with in-built stainless steel filters and non-return valves

For battery models

1.5V alkaline AA batteries

Battery life: 4 years with an average of 200 operations per day

Warning of flat batteries through LEDs on sensors


Built-in waterproof battery case

For mains models

230Vac - 5Vdc safety transformer



Pack contents




Batteries included

Quadro Y



Quadro Y BT









www.dmpelectronics.com/en/product-details/quadro-y




QuadroMix Y with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
 QuadroMix-Y 215-BT 3 X 1.5V alkaline batteries	67406	Polished chrome		With DMP On-Off sensor
 QuadroMix-Y 215 230Vac/5Vdc transformer	07406	Polished chrome		
 QuadroMix-Y 150-BT 3 X 1.5V alkaline batteries	67416	Polished chrome		With DMP On-Off sensor
 QuadroMix-Y 150 230Vac/5Vdc transformer	07416	Polished chrome		


Accessories

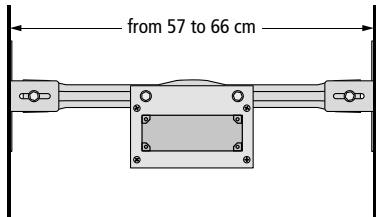Model	Code	
Metal frame for plasterboard walls	55547	



On request, recessed boxes can be supplied in advance

MiniUno 40

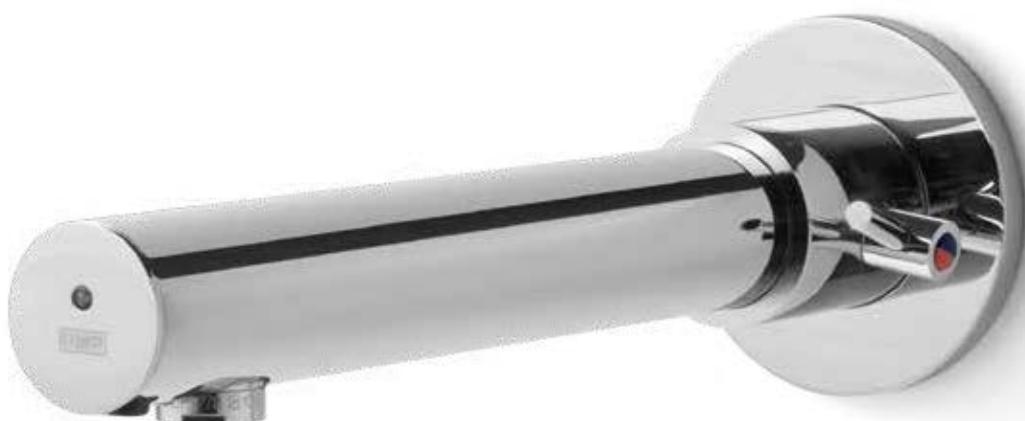

Mono Sensor

Eco-Flow Sensor



Features

For all models

Wall electronic tap, available in the Mono Sensor (page 45), Dual Sensor (page 46) and On-Off Sensor (page 47) versions
Solenoid valve built into the tap body
4.5V waterproof electronic circuit
Microchip programmed to control all functions
Functions optimized using DMP integrated software
Sensor beam adjustable from 5 to 30 cm
Polished or satin chrome-plated brass body
Available in various spout lengths
Anti-flooding automatic stop after 90 seconds
Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute
Solenoid valve with triple stainless steel anti-contaminant filter
Stop taps with in-built stainless steel filters and non-return valves

For battery models

1.5V alkaline AA batteries
Battery life: 4 years with an average of 200 operations per day
Warning of flat batteries through LEDs on sensors
Built-in waterproof battery case


For mains models

230Vac - 5Vdc safety transformer




Pack contents

MiniUno Mix




MiniUno



Batteries included



Important



MiniUno 40 must be installed at a minimum distance of 27cm from the bottom of the washbasin.



On request, recessed boxes can be supplied in advance



www.dmpelectronics.com/en/product-details/miniuno40



MiniUno Mix Mono Sensor with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUnoMix 40300 BT 2 X 1.5V alkaline batteries	85156 85158	Polished chrome Satin chrome		Fitting with recessed box
MiniUnoMix 40300 230Vac/5Vdc transformer	25156 25158	Polished chrome Satin chrome		
MiniUnoMix 40270 BT 2 X 1.5V alkaline batteries	85126 85128	Polished chrome Satin chrome		Fitting with recessed box
MiniUnoMix 40270 230Vac/5Vdc transformer	25126 25128	Polished chrome Satin chrome		
MiniUnoMix 40240 230Vac/5Vdc transformer	25116 25118	Polished chrome Satin chrome		Fitting with recessed box



MiniUno Mono Sensor for cold or pre-mixed water

Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUno 40300 BT 2 X 1.5V alkaline batteries	82986 82988	Polished chrome Satin chrome		Quick fit couplings
MiniUno 40312 230Vac/5Vdc transformer	22986 22988	Polished chrome Satin chrome		Fitting with recessed box
MiniUno 40250 BT 2 X 1.5V alkaline batteries	82956 82958	Polished chrome Satin chrome		Quick fit couplings
MiniUno 40262 230Vac/5Vdc transformer	22956 22958	Polished chrome Satin chrome		Fitting with recessed box
MiniUno 40215 BT 2 X 1.5V alkaline batteries	82926 82928	Polished chrome Satin chrome		Quick fit couplings
MiniUno 40227 230Vac/5Vdc transformer	22926 22928	Polished chrome Satin chrome		Fitting with recessed box

Accessories

Model	Code	
Metal frame for plasterboard walls For power-operated Miniunomix 40 and Miniuno 40	55512	
Metal frame for plasterboard walls For battery-operated Miniuno 40	55509	



MiniUno Mix Dual Sensor with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUnoMix DS 40300 BT 2 X 1.5V alkaline batteries	88806	Polished chrome		Fitting with recessed box
	88808	Satin chrome		
MiniUnoMix DS 40300 230Vac/5Vdc transformer	28806	Polished chrome		
	28808	Satin chrome		
MiniUnoMix DS 40270 BT 2 X 1.5V alkaline batteries	88816	Polished chrome		Fitting with recessed box
	88818	Satin chrome		
MiniUnoMix DS 40270 230Vac/5Vdc transformer	28816	Polished chrome		
	28818	Satin chrome		
MiniUnoMix DS 40240 230Vac/5Vdc transformer	28826	Polished chrome		Fitting with recessed box
	28828	Satin chrome		



MiniUno Dual Sensor for cold or pre-mixed water

Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUno DS 40300 BT 2 X 1.5V alkaline batteries	82716	Polished chrome		Quick fit couplings
	82718	Satin chrome		
MiniUno DS 40312 230Vac/5Vdc transformer	22716	Polished chrome		Fitting with recessed box
	22718	Satin chrome		
MiniUno DS 40250 BT 2 X 1.5V alkaline batteries	82906	Polished chrome		Quick fit couplings
	82908	Satin chrome		
MiniUno DS 40262 230Vac/5Vdc transformer	22906	Polished chrome		Fitting with recessed box
	22908	Satin chrome		
MiniUno DS 40215 BT 2 X 1.5V alkaline batteries	82706	Polished chrome		Quick fit couplings
	82708	Satin chrome		
MiniUno DS 40227 230Vac/5Vdc transformer	22706	Polished chrome		Fitting with recessed box
	22708	Satin chrome		

Patented
On-Off Sensor
(3 minutes max)

Eco-Flow Sensor

Dual Sensor





MiniUno Mix On-Off Sensor with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUnoMix On-Off 40300 BT 2 X 1.5V alkaline batteries	85153	Polished chrome		Fitting with recessed box
	85151	Satin chrome		
MiniUnoMix On-Off 40300 230Vac/5Vdc transformer	25153	Polished chrome		Fitting with recessed box
	25151	Satin chrome		
MiniUnoMix On-Off 40270 BT 2 X 1.5V alkaline batteries	85154	Polished chrome		Fitting with recessed box
	85152	Satin chrome		
MiniUnoMix On-Off 40270 230Vac/5Vdc transformer	25154	Polished chrome		Fitting with recessed box
	25152	Satin chrome		
MiniUnoMix On-Off 40240 230Vac/5Vdc transformer	25157	Polished chrome		Fitting with recessed box
	25159	Satin chrome		



MiniUno On-Off Sensor for cold or pre-mixed water

Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUno On-Off 40300 BT 2 X 1.5V alkaline batteries	82960	Polished chrome		Quick fit couplings
	82969	Satin chrome		
MiniUno On-Off 40312 230Vac/5Vdc transformer	22960	Polished chrome		Fitting with recessed box
	22969	Satin chrome		
MiniUno On-Off 40250 BT 2 X 1.5V alkaline batteries	82930	Polished chrome		Quick fit couplings
	82939	Satin chrome		
MiniUno On-Off 40262 230Vac/5Vdc transformer	22957	Polished chrome		Fitting with recessed box
	22959	Satin chrome		
MiniUno On-Off 40215 BT 2 X 1.5V alkaline batteries	82927	Polished chrome		Quick fit couplings
	82925	Satin chrome		
MiniUno On-Off 40227 230Vac/5Vdc transformer	22927	Polished chrome		Fitting with recessed box
	22929	Satin chrome		

Patented
On-Off Sensor
(3 minutes max)



On-Off Sensor



SpeedyMix Comp

Patented



Dual Sensor

On-Off Sensor

Eco-Flow Sensor



Mono Sensor

Eco-Flow Sensor



Features

For all models

Wall electronic tap, available in the Mono Sensor and Dual Sensor versions
 Tempered glass on-off front sensor
 Solenoid valve built into the tap body
 3V waterproof electronic circuit
 Microchip programmed to control all functions
 Functions optimized using DMP integrated software
 Sensor beam adjustable from 5 to 25 cm
 Polished chrome-plated brass body with swivel spout
 Two spout lengths, with standard or American interaxis
 Anti-flooding automatic stop after 90 seconds
 Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute
 Ceramic disk mixer
 Continuous water flow mode
 Manual function
 Solenoid valve with triple stainless steel anti-contaminant filter
 0.2mm mesh stainless steel filters

For battery models


1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case



Pack contents

SpeedyMix Comp Dual Sensor

SpeedyMix Comp Mono Sensor

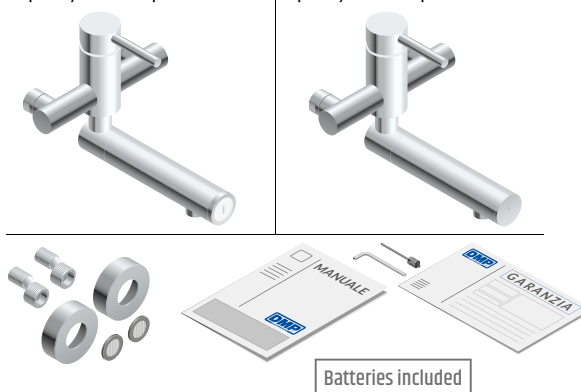

Batteries included


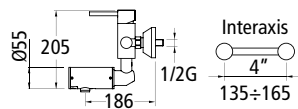
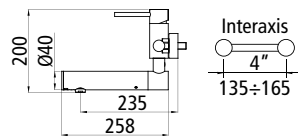

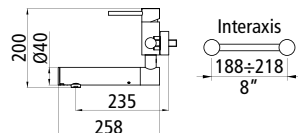


www.dmpelectronics.com/en/product-details/speedymix-comp




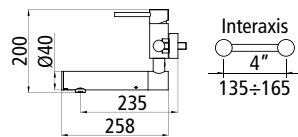
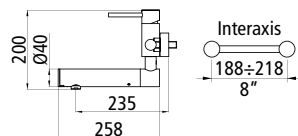
SpeedyMix Comp Mono Sensor with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm
 SpeedyMix-Comp 280 BT 2 X 1.5V alkaline batteries	73726	Polished chrome	
SpeedyMix-Comp SV 40250 BT 2 X 1.5V alkaline batteries	73647	Polished chrome	
SpeedyMix-Comp 880 BT 2 X 1.5V alkaline batteries	73756	Polished chrome	
SpeedyMix-Comp SV 40850 BT 2 X 1.5V alkaline batteries	73777	Polished chrome	




SpeedyMix Comp Dual Sensor with hot/cold water mixer

Model and feeding	Code	Colour	Dimensions in mm
 SpeedyMix-Comp DS 40250 BT 2 X 1.5V alkaline batteries	73847	Polished chrome	
SpeedyMix-Comp DS 40850 BT 2 X 1.5V alkaline batteries	73877	Polished chrome	

Accessories

Model	Code
Metal frame for plasterboard walls	55518

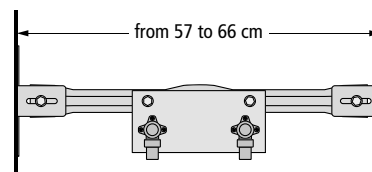



Speedy C



Features

For all models

Electronic tap with anti-scratch and anti-limescale DMP sensor
 4.5V waterproof electronic circuit
 Microchip programmed to control all functions
 Functions optimized using DMP integrated software
 Sensor beam adjustable from 5 to 30 cm
 Polished stainless steel plate with vandal-proof concealed screws
 Polished chrome-plated brass spout, fixed or swivel
 Seven spout lengths available
 External or recessed stainless steel case with quick-fit couplings
 Anti-flooding automatic stop after 90 seconds
 Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute
 Manual operating device (for 300 models)
 Solenoid valve with triple stainless steel anti-contaminant filter
 Stop taps with in-built stainless steel filters and non-return valves

For battery models


1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case

For mains models

230Vac - 5Vdc safety transformer



Pack contents

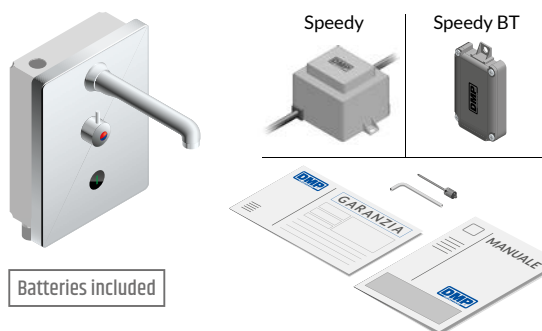

Batteries included



On request, recessed boxes can be supplied in advance





www.dmpelectronics.com/en/product-details/speedy



SpeedyMix 200 recessed with hot/cold water mixer





Model and feeding	Code	Colour	Spout	Dimensions in mm
SpeedyMix 209 BT 3 X 1.5V alkaline batteries				
SpeedyMix 216 BT 3 X 1.5V alkaline batteries				
SpeedyMix 221 BT 3 X 1.5V alkaline batteries				
SpeedyMix 225 BT 3 X 1.5V alkaline batteries				
SpeedyMix 215 BT 3 X 1.5V alkaline batteries				
SpeedyMix 219 BT 3 X 1.5V alkaline batteries				
SpeedyMix 220 BT 3 X 1.5V alkaline batteries				
SpeedyMix 209 230Vac/5Vdc transformer				
SpeedyMix 216 230Vac/5Vdc transformer				
SpeedyMix 221 230Vac/5Vdc transformer				
SpeedyMix 225 230Vac/5Vdc transformer				
SpeedyMix 215 230Vac/5Vdc transformer				
SpeedyMix 219 230Vac/5Vdc transformer				
SpeedyMix 220 230Vac/5Vdc transformer				



Speedy 200 recessed for cold or pre-mixed water

Model and feeding	Code	Colour	Spout	Dimensions in mm
Speedy 209 BT 3 X 1.5V alkaline batteries				
Speedy 216 BT 3 X 1.5V alkaline batteries				
Speedy 221 BT 3 X 1.5V alkaline batteries				
Speedy 225 BT 3 X 1.5V alkaline batteries				
Speedy 215 BT 3 X 1.5V alkaline batteries				
Speedy 219 BT 3 X 1.5V alkaline batteries				
Speedy 220 BT 3 X 1.5V alkaline batteries				
Speedy 209 230Vac/5Vdc transformer				
Speedy 216 230Vac/5Vdc transformer				
Speedy 221 230Vac/5Vdc transformer				
Speedy 225 230Vac/5Vdc transformer				
Speedy 215 230Vac/5Vdc transformer				
Speedy 219 230Vac/5Vdc transformer				
Speedy 220 230Vac/5Vdc transformer				






SpeedyMix 300 recessed with hot/cold water mixer




Model and feeding	Code	Colour	Spout
SpeedyMix 309 BT 3 X 1.5V alkaline batteries	67146	Polished chrome	Fixed 110 mm
SpeedyMix 316 BT 3 X 1.5V alkaline batteries	67156	Polished chrome	Fixed 170 mm
SpeedyMix 321 BT 3 X 1.5V alkaline batteries	67111	Polished chrome	Fixed 210 mm
SpeedyMix 325 BT 3 X 1.5V alkaline batteries	67115	Polished chrome	Fixed 250 mm
SpeedyMix 315 BT 3 X 1.5V alkaline batteries	77146	Polished chrome	Swivel 155 mm
SpeedyMix 319 BT 3 X 1.5V alkaline batteries	77156	Polished chrome	Swivel 185 mm
SpeedyMix 320 BT 3 X 1.5V alkaline batteries	77122	Polished chrome	Swivel 200 mm
SpeedyMix 309 230Vac/5Vdc transformer	07146	Polished chrome	Fixed 110 mm
SpeedyMix 316 230Vac/5Vdc transformer	07156	Polished chrome	Fixed 170 mm
SpeedyMix 321 230Vac/5Vdc transformer	07111	Polished chrome	Fixed 210 mm
SpeedyMix 325 230Vac/5Vdc transformer	07115	Polished chrome	Fixed 250 mm
SpeedyMix 315 230Vac/5Vdc transformer	17146	Polished chrome	Swivel 155 mm
SpeedyMix 319 230Vac/5Vdc transformer	17156	Polished chrome	Swivel 185 mm
SpeedyMix 320 230Vac/5Vdc transformer	17122	Polished chrome	Swivel 200 mm

Dimensions in mm

Fixed spout



Swivel spout



WITH MANUAL FUNCTION




Speedy 300 recessed for cold or pre-mixed water


Model and feeding	Code	Colour	Spout
Speedy 309 BT 3 X 1.5V alkaline batteries	67106	Polished chrome	Fixed 110 mm
Speedy 316 BT 3 X 1.5V alkaline batteries	67116	Polished chrome	Fixed 170 mm
Speedy 321 BT 3 X 1.5V alkaline batteries	67121	Polished chrome	Fixed 210 mm
Speedy 325 BT 3 X 1.5V alkaline batteries	67125	Polished chrome	Fixed 250 mm
Speedy 315 BT 3 X 1.5V alkaline batteries	77106	Polished chrome	Swivel 155 mm
Speedy 319 BT 3 X 1.5V alkaline batteries	77116	Polished chrome	Swivel 185 mm
Speedy 320 BT 3 X 1.5V alkaline batteries	77120	Polished chrome	Swivel 200 mm
Speedy 309 230Vac/5Vdc transformer	07106	Polished chrome	Fixed 110 mm
Speedy 316 230Vac/5Vdc transformer	07116	Polished chrome	Fixed 170 mm
Speedy 321 230Vac/5Vdc transformer	07121	Polished chrome	Fixed 210 mm
Speedy 325 230Vac/5Vdc transformer	07125	Polished chrome	Fixed 250 mm
Speedy 315 230Vac/5Vdc transformer	17106	Polished chrome	Swivel 155 mm
Speedy 319 230Vac/5Vdc transformer	17116	Polished chrome	Swivel 185 mm
Speedy 320 230Vac/5Vdc transformer	17120	Polished chrome	Swivel 200 mm

Dimensions in mm

Fixed spout



Swivel spout


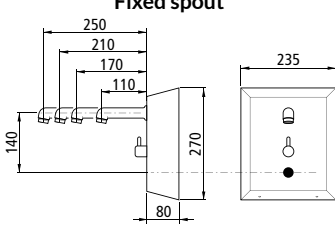
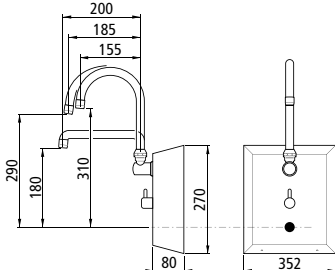



WITH MANUAL FUNCTION




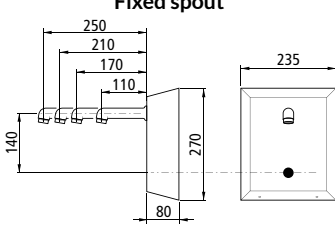
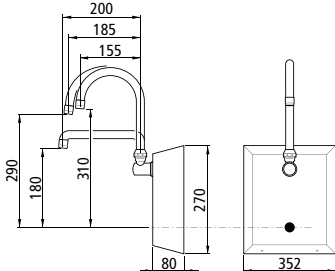

SpeedyMix 200 C with hot/cold water mixer



Model and feeding	Code	Colour	Spout	Dimensions in mm
 SpeedyMix 209-C BT 3 X 1.5V alkaline batteries SpeedyMix 216-C BT 3 X 1.5V alkaline batteries SpeedyMix 221-C BT 3 X 1.5V alkaline batteries SpeedyMix 225-C BT 3 X 1.5V alkaline batteries SpeedyMix 215-C BT 3 X 1.5V alkaline batteries SpeedyMix 219-C BT 3 X 1.5V alkaline batteries SpeedyMix 220-C BT 3 X 1.5V alkaline batteries	67066	Polished chrome	Fixed 110 mm	Fixed spout  Swivel spout 
	67076	Polished chrome	Fixed 170 mm	
	67091	Polished chrome	Fixed 210 mm	
	67085	Polished chrome	Fixed 250 mm	
	77066	Polished chrome	Swivel 155 mm	
	77076	Polished chrome	Swivel 185 mm	
	77062	Polished chrome	Swivel 200 mm	
 SpeedyMix 209-C 230Vac/5Vdc transformer SpeedyMix 216-C 230Vac/5Vdc transformer SpeedyMix 221-C 230Vac/5Vdc transformer SpeedyMix 225-C 230Vac/5Vdc transformer SpeedyMix 215-C 230Vac/5Vdc transformer SpeedyMix 219-C 230Vac/5Vdc transformer SpeedyMix 220-C 230Vac/5Vdc transformer	07066	Polished chrome	Fixed 110 mm	
	07076	Polished chrome	Fixed 170 mm	
	07091	Polished chrome	Fixed 210 mm	
	07085	Polished chrome	Fixed 250 mm	
	17066	Polished chrome	Swivel 155 mm	
	17076	Polished chrome	Swivel 185 mm	
	17062	Polished chrome	Swivel 200 mm	



Speedy 200 C for cold or pre-mixed water

Model and feeding	Code	Colour	Spout	Dimensions in mm
 Speedy 209-C BT 3 X 1.5V alkaline batteries Speedy 216-C BT 3 X 1.5V alkaline batteries Speedy 221-C BT 3 X 1.5V alkaline batteries Speedy 225-C BT 3 X 1.5V alkaline batteries Speedy 215-C BT 3 X 1.5V alkaline batteries Speedy 219-C BT 3 X 1.5V alkaline batteries Speedy 220-C BT 3 X 1.5V alkaline batteries	67026	Polished chrome	Fixed 110 mm	Fixed spout  Swivel spout 
	67036	Polished chrome	Fixed 170 mm	
	67041	Polished chrome	Fixed 210 mm	
	67035	Polished chrome	Fixed 250 mm	
	77026	Polished chrome	Swivel 155 mm	
	77036	Polished chrome	Swivel 185 mm	
	77032	Polished chrome	Swivel 200 mm	
 Speedy 209-C 230Vac/5Vdc transformer Speedy 216-C 230Vac/5Vdc transformer Speedy 221-C 230Vac/5Vdc transformer Speedy 225-C 230Vac/5Vdc transformer Speedy 215-C 230Vac/5Vdc transformer Speedy 219-C 230Vac/5Vdc transformer Speedy 220-C 230Vac/5Vdc transformer	07026	Polished chrome	Fixed 110 mm	
	07036	Polished chrome	Fixed 170 mm	
	07041	Polished chrome	Fixed 210 mm	
	07035	Polished chrome	Fixed 250 mm	
	17026	Polished chrome	Swivel 155 mm	
	17036	Polished chrome	Swivel 185 mm	
	17032	Polished chrome	Swivel 200 mm	



SpeedyMix 300 C with hot/cold water mixer



Model and feeding	Code	Colour	Spout	Dimensions in mm
Fixed spout				
SpeedyMix 309-C BT 3 X 1.5V alkaline batteries	67166	Polished chrome	Fixed 110 mm	
SpeedyMix 316-C BT 3 X 1.5V alkaline batteries	67176	Polished chrome	Fixed 170 mm	
SpeedyMix 321-C BT 3 X 1.5V alkaline batteries	67191	Polished chrome	Fixed 210 mm	
SpeedyMix 325-C BT 3 X 1.5V alkaline batteries	67185	Polished chrome	Fixed 250 mm	
Swivel spout				
SpeedyMix 315-C BT 3 X 1.5V alkaline batteries	77166	Polished chrome	Swivel 155 mm	
SpeedyMix 319-C BT 3 X 1.5V alkaline batteries	77176	Polished chrome	Swivel 185 mm	
SpeedyMix 320-C BT 3 X 1.5V alkaline batteries	77162	Polished chrome	Swivel 200 mm	
WITH MANUAL FUNCTION				
SpeedyMix 309-C 230Vac/5Vdc transformer	07166	Polished chrome	Fixed 110 mm	
SpeedyMix 316-C 230Vac/5Vdc transformer	07176	Polished chrome	Fixed 170 mm	
SpeedyMix 321-C 230Vac/5Vdc transformer	07191	Polished chrome	Fixed 210 mm	
SpeedyMix 325-C 230Vac/5Vdc transformer	07185	Polished chrome	Fixed 250 mm	
SpeedyMix 315-C 230Vac/5Vdc transformer	17166	Polished chrome	Swivel 155 mm	
SpeedyMix 319-C 230Vac/5Vdc transformer	17176	Polished chrome	Swivel 185 mm	
SpeedyMix 320-C 230Vac/5Vdc transformer	17162	Polished chrome	Swivel 200 mm	




Speedy 300 C for cold or pre-mixed water

Model and feeding	Code	Colour	Spout	Dimensions in mm
Fixed spout				
Speedy 309-C BT 3 X 1.5V alkaline batteries	67126	Polished chrome	Fixed 110 mm	
Speedy 316-C BT 3 X 1.5V alkaline batteries	67136	Polished chrome	Fixed 170 mm	
Speedy 321-C BT 3 X 1.5V alkaline batteries	67141	Polished chrome	Fixed 210 mm	
Speedy 325-C BT 3 X 1.5V alkaline batteries	67135	Polished chrome	Fixed 250 mm	
Swivel spout				
Speedy 315-C BT 3 X 1.5V alkaline batteries	77126	Polished chrome	Swivel 155 mm	
Speedy 319-C BT 3 X 1.5V alkaline batteries	77136	Polished chrome	Swivel 185 mm	
Speedy 320-C BT 3 X 1.5V alkaline batteries	77132	Polished chrome	Swivel 200 mm	
WITH MANUAL FUNCTION				
Speedy 309-C 230Vac/5Vdc transformer	07126	Polished chrome	Fixed 110 mm	
Speedy 316-C 230Vac/5Vdc transformer	07136	Polished chrome	Fixed 170 mm	
Speedy 321-C 230Vac/5Vdc transformer	07141	Polished chrome	Fixed 210 mm	
Speedy 325-C 230Vac/5Vdc transformer	07135	Polished chrome	Fixed 250 mm	
Speedy 315-C 230Vac/5Vdc transformer	17126	Polished chrome	Swivel 155 mm	
Speedy 319-C 230Vac/5Vdc transformer	17136	Polished chrome	Swivel 185 mm	
Speedy 320-C 230Vac/5Vdc transformer	17132	Polished chrome	Swivel 200 mm	

Speedy Accessories for recessed models



Model	Code
Metal frame for plasterboard walls	55515

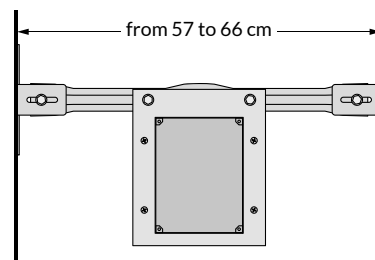

Sanileo Tap electronic kit





RB 10




RB 12




Sanileo for cold or pre-mixed water

Model and feeding	Code	Colour
 Sanileo RB 10 BT 3 X 1.5V alkaline batteries	79715	Polished chrome
Sanileo RB 12 BT 3 X 1.5V alkaline batteries	79716	Polished chrome
 Sanileo RB 10 230Vac/5Vdc transformer	19715	Polished chrome
Sanileo RB 12 230Vac/5Vdc transformer	19716	Polished chrome

SANILEO RB 10 and SANILEO RB 10 BT diagram For wall fitting

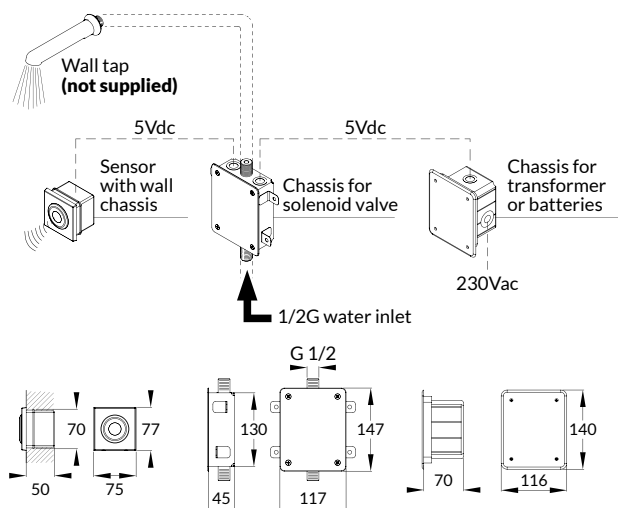

SANILEO RB 12 and SANILEO RB 12 BT diagram For fitting on corridor or technical area

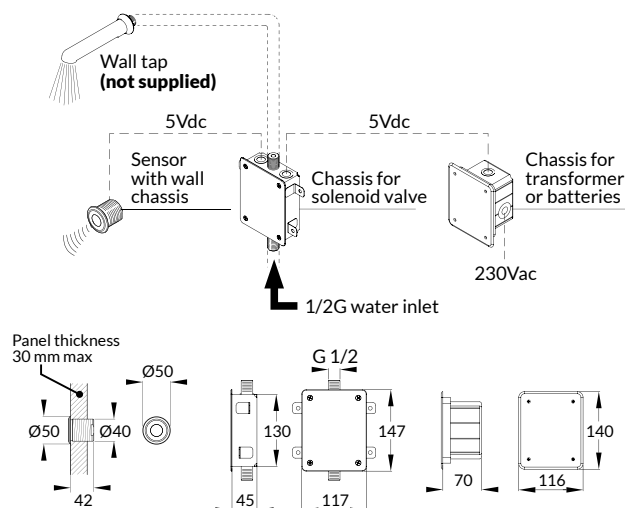

UnoMix



Uno



Features

For all models


Electronic tap with anti-scratch and anti-limescale DMP sensor
 3V waterproof electronic circuit
 Microchip programmed to control all functions
 Functions optimized using DMP integrated software
 Sensor beam adjustable from 8 to 35 cm
 Polished chrome-plated brass body
 Available in two different spout lengths
 Installation on retrofit systems
 Technical area or service corridor for UnoMix is required
 Anti-flooding automatic stop after 90 seconds
 Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute
 Solenoid valve with triple stainless steel anti-contaminant filter
 Stop taps with in-built stainless steel filters and non-return valves

Power

1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case (Uno)



Pack contents

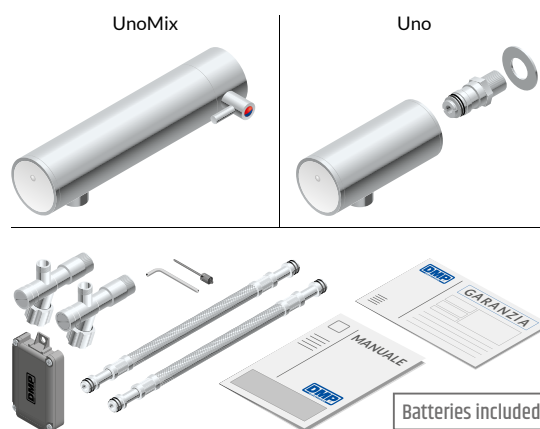




www.dmpelectronics.com/en/product-details/uno






Uno with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
 UnoMix 15 BT 3 X 1.5V alkaline batteries	83606	Polished chrome		Fitting in technical area or service corridor (see details in the drawing below)
UnoMix 24 BT 3 X 1.5V alkaline batteries	82606	Polished chrome		




Uno for cold or pre-mixed water

Model and feeding	Code	Colour	Dimensions in mm	Notes
 Uno 12 Fr BT 2 X 1.5V alkaline batteries	83516	Polished chrome		Assembly onto masonry wall
Uno 21 Fr BT 2 X 1.5V alkaline batteries	82516	Polished chrome		


Accessories

Model	Code
Metal frame for plasterboard walls <i>Only for Uno models</i>	55521

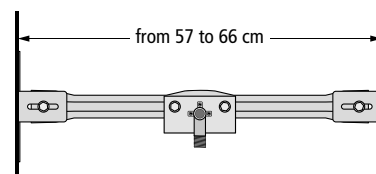


Important

The UnoMix 15 BT and UnoMix 24 BT models can be installed only if an appropriate technical area or service corridor measuring 50cm minimum is present in the site. Follow the instructions in the drawing on the right carefully.

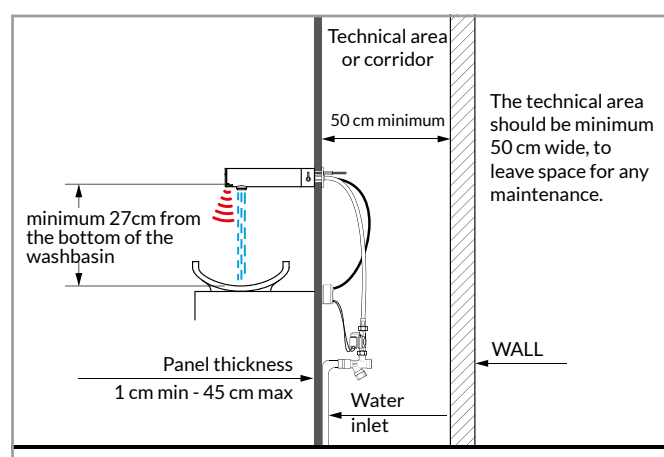

MiniUno 32

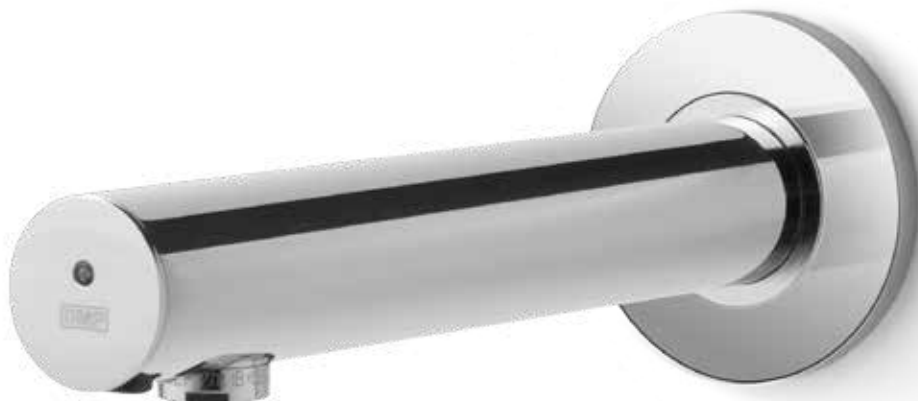

Features

For all models

Electronic tap with anti-scratch and anti-limescale DMP sensor
 3V waterproof electronic circuit
 Microchip programmed to control all functions
 Functions optimized using DMP integrated software
 Sensor beam adjustable from 8 to 35 cm
 Polished chrome-plated brass body
 Available in two different configurations:
 - can be installed only in technical area or corridor (MiniUno 32)
 - can be installed only with recessed boxes (MiniUno 32 CC)
 Anti-flooding automatic stop after 90 seconds
 Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute
 Solenoid valve with triple stainless steel anti-contaminant filter
 Stop taps with in-built stainless steel filters and non-return valves

For battery models



1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case

For mains models

230Vac - 5Vdc safety transformer



Pack contents

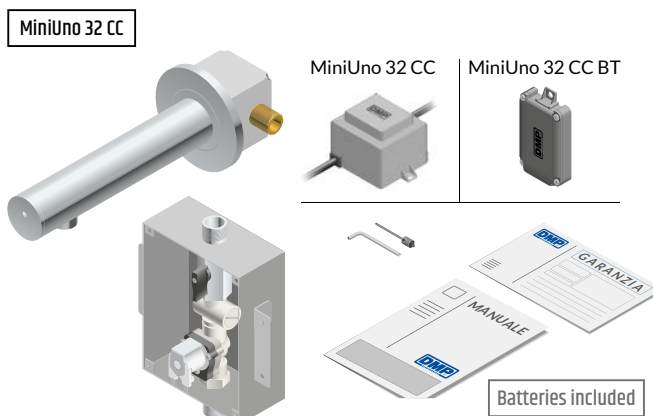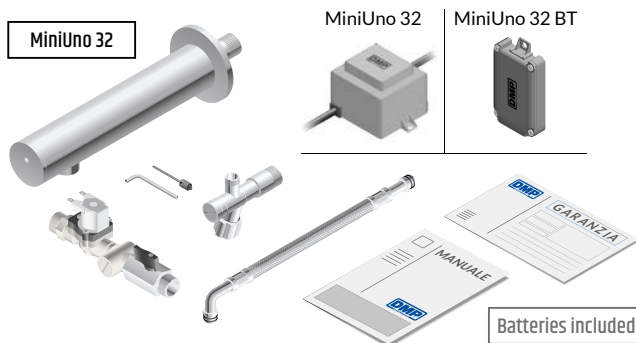

www.dmpelectronics.com/en/product-details/miniuno32



MiniUnoMix 32 with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUnoMix 32200 BT 3 X 1.5V alkaline batteries	85506	Polished chrome		Fitting in technical area or service corridor (see details in the drawing below)
MiniUnoMix 32200 230Vac/5Vdc transformer	25506	Polished chrome		



MiniUno 32 for cold or pre-mixed water

Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUno 32200 BT 3 X 1.5V alkaline batteries	84506	Polished chrome		Fitting in technical area or service corridor (see details in the drawing below)
MiniUno 32200 230Vac/5Vdc transformer	24506	Polished chrome		



MiniUno 32 CC for cold or pre-mixed water


Model and feeding	Code	Colour	Dimensions in mm	Notes
MiniUno 32 CC BT 3 X 1.5V alkaline batteries	85606	Polished chrome		Fitting with recessed box (see details in the drawing below)
MiniUno 32 CC 230Vac/5Vdc transformer	25606	Polished chrome		



Important


MiniUnoMix 32 - MiniUno 32

The MiniUnoMix 32 and MiniUno 32 models can be installed **ONLY** if an appropriate technical area or service corridor measuring 50cm minimum is present in the site.

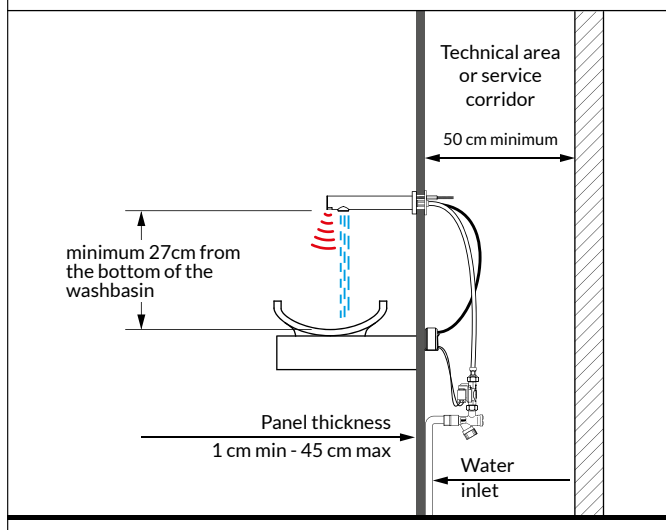


MiniUno 32 CC

The MiniUno 32 CC models can be installed directly onto the wall, with the appropriate recessed boxes, top for the tap and bottom for the solenoid valve.

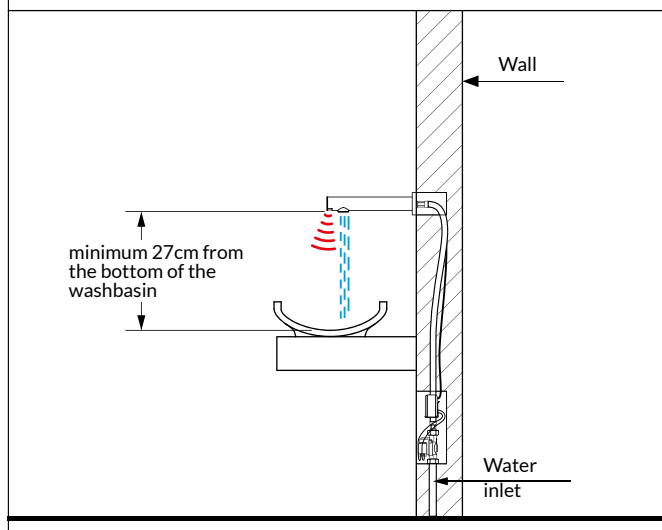

Washbasin electronic taps

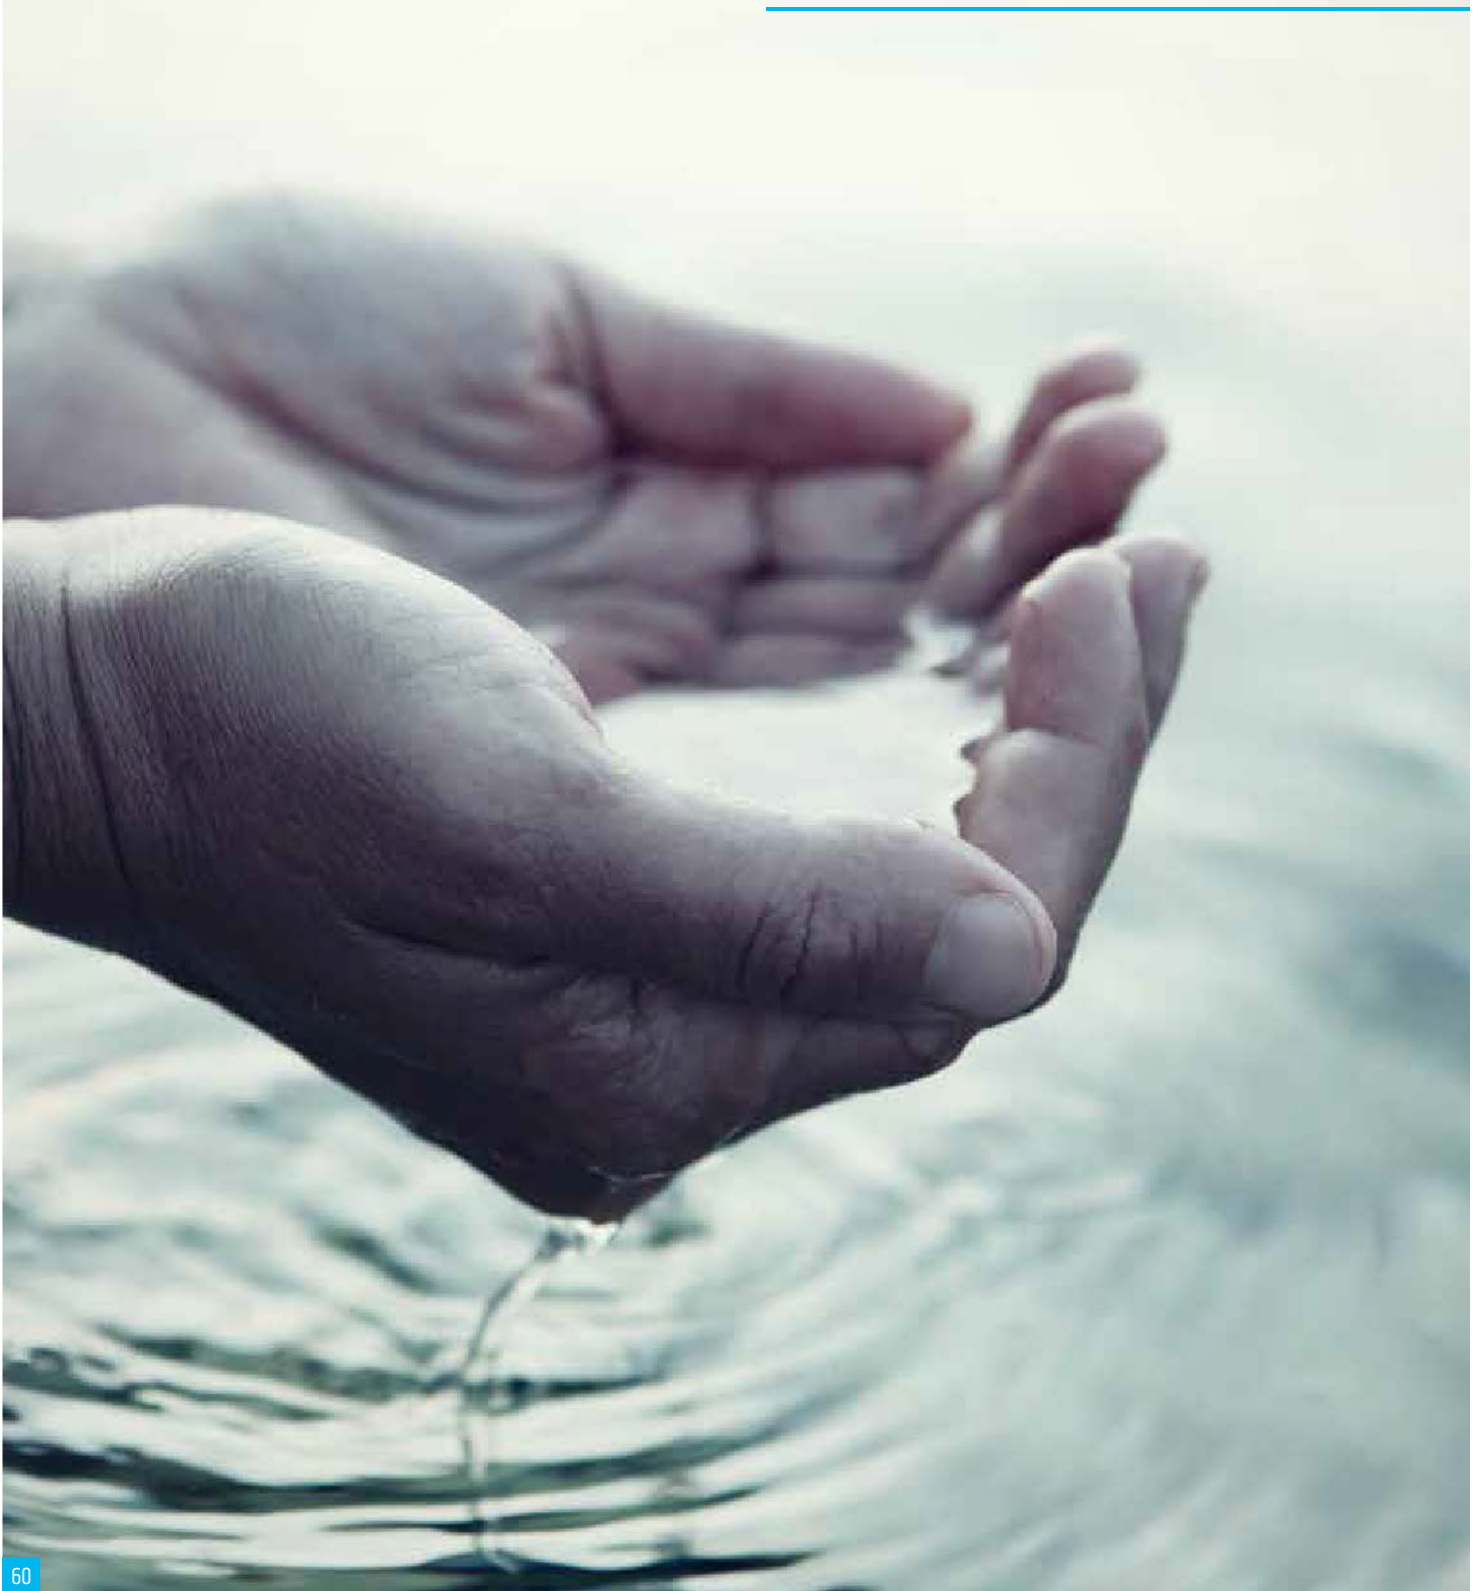



Main features

- ☒ **DMP Infrared Sensor** technology
- ☒ Up to **80%** water saving
- ☒ **Simple** installation
- ☒ **Same price** for battery or mains models
- ☒ Use of **common alkaline batteries**
- ☒ Safety **transformer** (IMQ)
- ☒ Complete packs, **everything included**
- ☒ 2 years' **warranty**



Certifications



Handly
p. 62

NEW



Cento
p. 64



Quary Tap
p. 66



Tube Plus
p. 68



Eco Plus
p. 70



Green
p. 72

NEW



Class Metal
p. 74



Class ABS
p. 76



Sette
p. 78



Compacto
p. 80



Dia
p. 82



Handly

Patented

NEW



On-Off Sensor

Water starts flowing as soon as someone approaches the tap from the front; useful for dispensing water or filling containers.

Eco-Flow Sensor

It detects the presence of objects or people approaching from below, making it ideal for washing hands or objects.



For residential use



Features

Electronic tap with DMP Dual Sensor technology
 Tempered glass on-off front sensor
 Solenoid valve built into the tap body
 Sensor beam adjustable from 5 to 20 cm
 Ceramic disk mixer
 Anti-limescale tap aerator
 Manual function to be activated in case of depleted batteries
 Miniature components, integrated in the chrome-plated brass body
 Available in the Mono Sensor, Dual Sensor and On-Off versions
 Anti-flooding automatic stop after 3 minutes
 Stop taps with in-built stainless steel filters and non-return valves
 Fixed spout, ideal for washbasin
 Colours with special pigments, certified for food use

Power

1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Flat battery warning LED light on front sensor
 Built-in waterproof battery case



Pack contents





www.dmpelectronics.com/en/product-details/handly





Handly Dual Sensor with hot/cold water mixer



Model and feeding	Code	Colour	Dimensions in mm	Notes
 Handly 2 X 1.5V alkaline batteries	86406	Polished chrome		Fitted with On-Off front sensor and Eco-Flow vertical sensor
	86408	Satin finish		
	86403	Chrome/White		
	86499	Chrome/Black		





Handly Mono Sensor with hot/cold water mixer

Model and feeding	Code	Colour	Dimensions in mm	Notes
 Handly 2 X 1.5V alkaline batteries	87406	Polished chrome		Fitted with Eco-Flow vertical sensor
	87408	Satin finish		
	87403	Chrome/White		
	87499	Chrome/Black		



Handly On-Off Sensor with hot/cold water mixer

Model and feeding	Code	Colour	Dimensions in mm	Notes
 Handly 2 X 1.5V alkaline batteries	87706	Polished chrome		Fitted with On-Off front sensor
	87708	Satin finish		
	87703	Chrome/White		
	87799	Chrome/Black		



Available colours



Chrome



Satin finish



White



Black



Cento Mix 180

Cento Mix 130



Features

Electronic tap with anti-scratch and anti-limescale DMP sensor
 3V waterproof electronic circuit
 Solenoid valve built into the tap body
 Sensor beam adjustable from 5 to 30 cm
 Microchip programmed to control all functions
 Functions optimized using DMP integrated software
 Polished chrome-plated brass body Ø 40mm, with 2 different spout heights
 Available in two spout lengths: 180 mm and 130 mm
 With built-in, under sink mixer or for pre-mixed water
 Miniature components, integrated in the chrome-plated brass body
 Anti-flooding automatic stop after 90 seconds
 Standard water flow: 6 litres/minute. Optional: 1.9 or 3 litres/minute
 Stop taps with in-built stainless steel filters and non-return valves

For battery models

1.5V alkaline AA batteries
 Battery life: 4 years with an average of 200 operations per day
 Warning of flat batteries through LEDs on sensors
 Built-in waterproof battery case

For mains models

230Vac - 5Vdc safety transformer



Pack contents



Batteries included



www.dmpelectronics.com/en/product-details/cento